



542

FLEXIBLE, LIGHTWEIGHT PALM-COATED PU GLOVE WITH CUT RESISTANCE

Solid resistance to cutting, abrasion and tearing from a lightweight and supple glove. Ideal for delicate operations requiring high dexterity and excellent mechanical protection.

FEATURES

- › Cut resistance: Level B (EN 388:2016)
- › A flexible, light glove providing effective protection against cuts
- › Smooth polyurethane (PU) coated palm
- › Protects the palm from oils and grease
- › Maximum resistance to abrasion and tearing
- › Without special treatment
- › Seamless liner prevents irritation
- › Breathable back of hand to reduce perspiration
- › Minimal irritation risks



SUITABLE FOR

- | | |
|--|--|
| <h4>Typical Industries</h4> <ul style="list-style-type: none"> ▪ Aerospace ▪ Automotive ▪ Ceramics ▪ Construction ▪ Logistics ▪ Manufacturing ▪ Steel and Metal | <h4>Suitable Applications</h4> <ul style="list-style-type: none"> ▪ Electrical Appliance Assembly ▪ Handling Metal Parts ▪ Precision Mechanics ▪ Product Protection ▪ Second Fix ▪ White Goods Handling ▪ Wire Assembly |
|--|--|

CERTIFICATION

CAT II

EN 388:2016

CE

4341B

See overleaf for explanation



PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE
	COATING:	Polyurethane
COLOUR	White	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO5421	10 pairs per bag 200 pairs per case
7/M	SHO5422	
8/L	SHO5423	
9/XL	SHO5424	
10/XXL	SHO5425	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

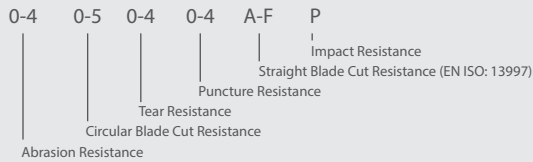

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

