



# 546W

## CUT RESISTANT DURACOIL LINER WITH WHITE PU COATING

Ultra-comfortable multi-purpose glove with durable cut resistant properties for precision handling. Engineered DURACOIL liner reinforced with HPPE providing level C cut resistance.

### FEATURES

- › Cut resistant: Level C (EN 388:2016) / ANSI/ISEA 105-16: A3
- › Multifilament polyester wrapping DURACOIL liner reinforced with HPPE provides effective protection against cuts
- › Lightweight and flexible with a Polyurethane coated palm for good grip & aeration
- › PU foamed coating protects the hand from light oils, grease and abrasions while remaining breathable
- › Maximum comfort when performing delicate tasks due to soft and flexible HPPE properties combined with high multifilament wrapping technique
- › Reinforced PU coating for increased abrasion resistance (Level 4)
- › Unique SHOWA ergonomic shape that replicates the natural curve of the human hand for enhanced dexterity and longer use
- › Seamless knit designed to prevent irritation
- › Light colour helps identify soiling and contamination



### SUITABLE FOR

#### Typical Industries

- Aerospace
- Automotive
- Laboratory
- Manufacturing
- Mechanical
- Metallurgy
- Pharmaceutical

#### Suitable Applications

- Intricate parts handling
- Laboratory, pharma & analyses
- Canning
- Cleanrooms
- Component Assembly
- White goods
- Mechanical engineering

### CERTIFICATION

CAT II



EN 388:2016



4X42C

See overleaf for explanation



# 546W

## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, Engineered yarn, polyester
	COATING:	Polyurethane
COLOUR	White	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO546W1	10 pairs per bag 120 pairs per case
7/M	SHO546W2	
8/L	SHO546W3	
9/XL	SHO546W4	
10/XXL	SHO546W5	


## RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

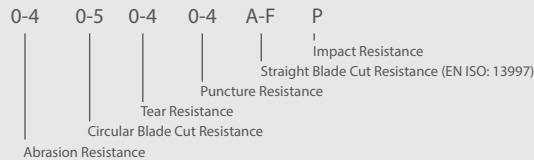

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-546W\_0620\_1