



# 546X

## UNCOATED CUT RESISTANT DURACOIL LINER

Uncoated flexible, lightweight glove providing effective protection against cuts with engineered DURACOIL liner reinforced with HPPE.

### FEATURES

- › Cut resistant: Level C (EN 388:2016) / ANSI/ISEA 105-16: A3
- › Increased cut resistance performance due to engineered DURACOIL wrapping technology
- › Maximum comfort when performing delicate tasks due to soft and flexible HPPE properties combined with high multifilament wrapping technique
- › 13-gauge liner with an uncoated palm
- › Optimal dexterity and tactile feel retained
- › Seamless knit designed to prevent irritation
- › Designed for easy movement and continuous wear
- › A lightweight, elastic low lint glove
- › White colour helps identify soiling and contamination



### SUITABLE FOR

#### Typical Industries

- Aerospace
- Automotive
- Cleanrooms
- Manufacturing
- Mechanical
- Warehousing & Distribution

#### Suitable Applications

- Intricate parts handling
- Cleanroom
- Component Assembly
- White goods
- Quality control

### CERTIFICATION

CAT II



EN 388:2016



4X41C

See overleaf for explanation





# 546X

## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, Engineered yarn, polyester
	COATING:	Uncoated
COLOUR	White	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO546X1	10 pairs per bag 200 pairs per case
7/M	SHO546X2	
8/L	SHO546X3	
9/XL	SHO546X4	


## RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

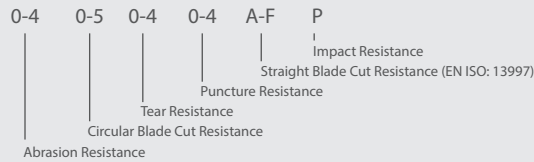

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-546X\_0620\_1