

## FULLY COATED, OIL RESISTANT GLOVE AND SLEEVE

Featuring an extended bonded sleeve, this fully coated PVC dipped glove offers excellent resistance to oils and protects the entire arm.

### FEATURES

- › Flexible, soft glove that absorbs perspiration, for ultra-comfortable extended wear
- › Excellent abrasion resistance (Level 4 EN 388:2003)
- › Seals and protects the hand against chemicals
- › Impermeable for working in damp or greasy environments
- › Rough textured finish enhances grip
- › Extended protection for the entire arm
- › Seamless for optimum comfort
- › Easy hang storage
- › Thickness: 1.3mm
- › Length: 660mm



### SUITABLE FOR

#### Typical Industries

- Agriculture
- Automotive
- Chemical
- Construction
- Petrochemical
- Public Utilities

#### Suitable Applications

- Commercial Fishing
- Chemical Handling
- Decontamination Work
- Dipping
- Drain/Sewer Cleaning
- Engine Servicing

### CERTIFICATION

CAT III



0120

EN 388:2016



4121X

EN ISO 374-1:2016/Type B



JKL

EN ISO 374-5:2016



See overleaf for explanation



# 690

## PRODUCT INFORMATION

<b>MATERIALS</b>	LINER:	Cotton
	COATING:	PVC
<b>COLOUR</b>	Blue	
<b>LENGTH (mm)</b>	660	
<b>CUFF STYLE</b>	Gauntlet with extended sleeve	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SHO6902	10 pairs per bag 60 pairs per case
9/L	SHO6903	
10/XL	SHO6904	
11/XXL	SHO6905	


## RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

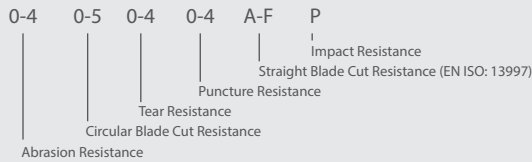

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-690\_0620\_1