



707HVO EBT

BIODEGRADABLE, CHEMICAL RESISTANT, HI-VIS GLOVE

100% biodegradable nitrile disposable glove with Eco Best Technology® in a hi-vis orange colour. Protects against oils, hydrocarbons, grease and many chemicals.

FEATURES

- › Unsupported, unlined, biodegradable nitrile glove that fits like a second skin
- › SHOWA's Eco Best Technology® enables the glove to biodegrade once disposed of in landfill
- › Fluorescent orange colour increases visibility
- › Bisque finish on palm and fingers provides a long-lasting grip
- › Impermeable for working in damp or greasy environments
- › Rolled cuff prevents dirt from entering the glove
- › Chlorinated for ease of donning and doffing
- › Thickness: 9 mil (0.23mm)
- › Length: 12" (305mm)



Eco Best Technology

Showa's Eco Best Technology (EBT) is composed of organic material that accelerates the biodegradation of nitrile in biologically active landfills without any sacrifice in performance



SUITABLE FOR

Typical Industries

- Agriculture
- Automotive
- Chemical
- Food
- Petrochemical
- Printing
- Utilities

Suitable Applications

- Chemical Handling
- Food Processing
- Handling Wet and Greasy Components
- Maintenance
- Janitorial

CERTIFICATION

CAT III	EN 388:2016	EN ISO 374-1:2016/Type A	EN ISO 374-5:2016	
2777	1000X	JKLOPT		

See overleaf for explanation





707HVO EBT

PRODUCT INFORMATION

MATERIALS	LINER:	Unsupported, unlined
	COATING:	Nitrile with SHOWA EBT®
COLOUR	Orange	
LENGTH (mm)	305	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6 /XS	SHO707HVO0	12 pairs per bag 144 pairs per case
7 /S	SHO707HVO1	
8 /M	SHO707HVO2	
9 /L	SHO707HVO3	
10 /XL	SHO707HVO4	
11 /XXL	SHO707HVO5	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical, cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

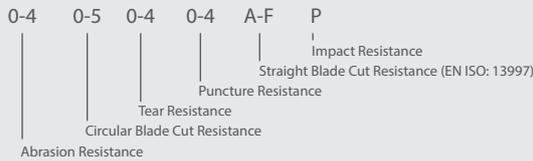

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



FOOD CONTACT DIRECTIVE EC 10/2011



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide	C	≥10 min for at least 1 chemical
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SHO-DATA-707HVO_0621_1