



NSK24 EBT

BIODEGREADABLE CHEMICAL RESISTANT DUAL NITRILE GAUNTLET

A flexible impermeable knit-lined nitrile glove with EBT technology providing grip and protection from an array of solvents, oils and acids.

FEATURES

- › Double nitrile coating provides excellent chemical, oils, hydrocarbons and abrasion resistance
- › Cotton liner absorbs perspiration, for ultra-comfortable extended wear and with good mechanical resistance
- › Engineered with EBT, making the glove biodegradable in biologically active landfills and within 1-5 years
- › Impermeable for working in damp, oily or greasy environments
- › Scalloped edge
- › The rough textured finish ensures excellent grip
- › Suitable for food handling
- › Forearm well protected
- › Length: 350mm (14inch)
- › Also available in 650mm (26inch): NSK 26



SUITABLE FOR

Typical Industries

- Agriculture
- Chemical
- Construction
- Food
- Manufacturing
- Municipal Services
- Oil and Gas

Suitable Applications

- Agro-Chemicals
- Chemical Handling
- Handling Paints
- Handling Fluid-Coated Components
- Handling Oils
- Industrial Tool Maintenance
- Refining

CERTIFICATION

CAT III	EN 388:2016	EN ISO 374-1:2016/Type A	EN ISO 374-5:2016	
2777	4112X	JKLOPT		

See overleaf for explanation





NSK24 EBT

PRODUCT INFORMATION

MATERIALS	LINER:	Cotton
	COATING:	Nitrile
COLOUR	Royal blue	
LENGTH (mm)	350	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/S	SHONSK241	12 pairs per bag
9/M	SHONSK242	
10/L	SHONSK243	72 pairs per case
11/XL	SHONSK244	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical and cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

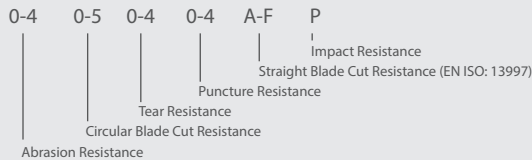

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



FOOD CONTACT DIRECTIVE 2002 / 72 EC



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofurane	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SHO-DATA-NSK24 EBT_0221_1