



# S-TEX 377

## CUT RESISTANT, WATERPROOF WITH LONG LASTING OIL RESISTANT GRIP

A flexible and robust fully coated nitrile glove to protect against water, grease, oil and abrasion with high cut resistance. The additional nitrile foam palm coating provides outstanding grip in wet and oily conditions.

### FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Hagane Coil® technology liner provides cut resistance performance yet allows freedom of movement as the hand flexes
- › Full coating of flat nitrile protects against water, oils, grease and abrasion
- › Nitrile foam palm coating provides optimal long lasting grip in wet and oily conditions
- › Manufactured using SHOWA's patented hand former design for a comfortable fit and to minimise hand fatigue
- › Seamless knitted liner prevents irritation
- › Lightweight, 13 gauge liner allows excellent hand dexterity
- › Elasticated knitted wrist helps to keep the glove correctly adjusted
- › Long cuff ensures wrist is protected



### SUITABLE FOR

#### Typical Industries

- Automotive
- Cementing
- Construction
- Glass and Glazing
- Metallurgy
- Oil and Gas
- Waste Management

#### Suitable Applications

- Concreting
- Handling Components with Sharp Edges
- Handling Oily Components
- Maintenance
- Oil Submersion
- Wet Work
- Press Stamping

### CERTIFICATION



See overleaf for explanation





# S-TEX 377

## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge Hagane Coil® (Stainless steel/polyester)
	COATING:	Foam nitrile
COLOUR	Grey/blue and black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHOS3771	10 pairs per bag
7/M	SHOS3772	
8/L	SHOS3773	120 pairs per case
9/XL	SHOS3774	
10/XXL	SHOS3775	


## RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal, electrical and Chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

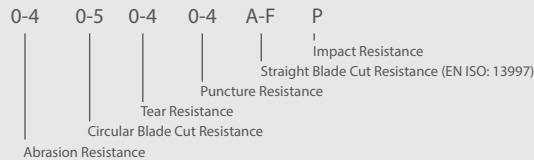

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-S-TEC 377\_0620\_1