

SUPPLE AND LIGHTWEIGHT WITH CUT RESISTANCE AND PU PALM

Offers dexterity and comfort with good resistance to cuts, rips and punctures. The thin polyurethane coating allows components and materials to be handled precisely.

FEATURES

- › Cut resistant: Level B (EN 388:2016)
- › Supple and lightweight
- › Extremely durable
- › Offers outstanding flexibility with a tactile touch
- › Excellent grip in both dry and damp environments
- › Anatomically designed for comfort, dexterity and fit
- › Coated with polyurethane on palm up to fingers
- › Sanitized® antimicrobial finish provides extra freshness





CUT LEVEL
B



Sanitized
Actifresh






VENDING MACHINE
COMPATIBLE

SUITABLE FOR

- | | |
|---|--|
| <p>Typical Industries</p> <ul style="list-style-type: none"> ▪ Aerospace ▪ Automotive ▪ Construction ▪ Engineering ▪ Glass ▪ Manufacturing | <p>Suitable Applications</p> <ul style="list-style-type: none"> ▪ Bottling or Canning ▪ Component Assembly ▪ Packaging ▪ Second Fix ▪ Warehousing and Distribution |
|---|--|

CERTIFICATION

CAT II	EN 388:2016	ANSI/ISEA 105
		
	4X43B	
<i>See overleaf for explanation</i>		



PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY461	10 pairs per bag
8/M	SKY462	
9/L	SKY463	
10/XL	SKY464	
11/XXL	SKY465	120 pairs per case


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

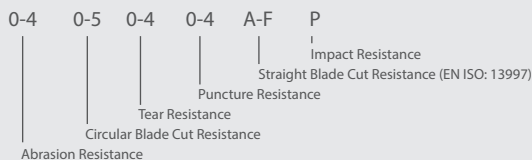

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Braetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).

UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.