

HIGH CUT RESISTANT IMPACT GLOVE WITH ROBUST AND FLEXIBLE IMPACT PANEL

A flexible seamless impact cut resistant glove level F/A6 with sandy nitrile on the palm to maximize grip. Ergonomic TPR design allows outstanding flexibility.

FEATURES

- › Cut resistance: level F (EN388:2016) / ANSI A6
- › 13 gauge (HPPE, steel) liner offers great dexterity for fine handling
- › Excellent grip with a nitrile foam sandy coating on the palm
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb and back of hand
- › Reinforced thumb crotch enhances durability
- › Ergonomically designed TPR follow the hand movement reducing hand fatigue
- › TPR zones are sewn to the liner for increased resistance
- › Elasticated wrist provides a secure fit
- › Contact heat protection up to 100°C / 212°F for a short period (15 sec max)
- › Touchscreen capabilities to allow usage with screen devices



SUITABLE FOR


Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

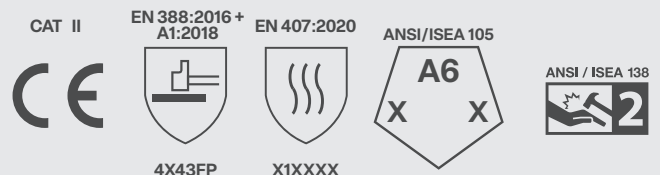

See overleaf for explanation

PRODUCTION INFORMATION		
MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Foam nitrile
COLOUR	Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

- ### RECOMMENDATIONS FOR USE
- USE: General handling glove with cut and impact protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
 - STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
 - CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
 - LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS		
SIZE	CODE	PACKAGING
7/S	SKG00082FD	10 pairs per bag
8/M	SKG00082FF	
9/L	SKG00082FH	
10/XL	SKG00082FJ	60 pairs per case
11/XXL	SKG00082FL	
12/XXXL	SKG00082FN	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance	Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Straight Blade Cut Resistance (EN ISO: 13997)	Impact Resistance

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

HEAT AND FIRE EN 407 PERFORMANCE LEVELS

0-4	0-4	0-4	0-4	0-4	0-4
Contact Heat Resistance	Convective Heat Resistance	Radiant Heat Resistance	Resistance to Small Drops Of Molten Metal	Resistance to Large Splashes of Molten Metal	Burning Behaviour

CLASSIFICATION FOR IMPACT RESISTANCE

Performance level	Mean (kJ)	All impacts (kJ)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

GLOBUS

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS
www.globusgroup.com
E: americas@globusgroup.com

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.