

INSULATED AND WATERPROOF, IMPACT RESISTANT GLOVE WITH HIGH CUT PROTECTION

With an added waterproof internal barrier to keep hands dry and protected from liquids, cuts, and impacts. Flexible enough to handle small parts despite multiple layers.

FEATURES

- › Cut resistant: Level F / ANSI A6
- › Liquid proof barrier blocks contact from water liquids
- › Teflon® treated synthetic leather palm resists oil and water
- › Ergonomically curved fingers to reduce hand fatigue
- › Double-stitched Kevlar® thread to bolster high wear areas
- › High Visibility for efficient signalling
- › ANSI Level 2 Impact Coverage
- › Contact Heat Resistant up to 250°C/482°F



SUITABLE FOR

Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

CAT II	EN 388:2016	EN511: 2006	ANSI / ISEA 133	ANSI/ISEA 105
				
	3X43FP	121		

See overleaf for explanation



PRODUCTION INFORMATION

MATERIALS	LINER:	Polyester Fabric Laminated Spandex with TPR
	COATING:	Synthetic leather and aramid lining with 360° water barrier material and polyester fabric
COLOUR	Red/Blue and yellow	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Loose neoprene cuff	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKG00035DF	10 pairs per bag
9/L	SKG00035DH	
10/XL	SKG00035DJ	60 pairs per case
11/XXL	SKG00035DL	
12/XXXL	SKG00035DN	
13/XXXXL	SKG00035DP	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with with cut, cold and impact protection. Not suitable for high contact heat (beyond 250°C / 482°F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

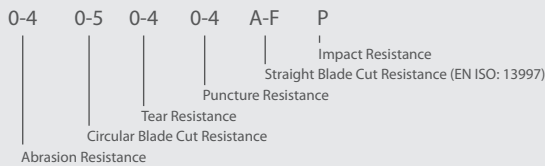

COLD HAZARDS EN 511



CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

CLASSIFICATION FOR IMPACT RESISTANCE

Performance level	Mean (kJ)	All impacts (kJ)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified Body No. 2575)

© 2023 Globus (Shetland) Ltd | SKY-DATA-TORQ-QUANTUM-1123,1