



THERMAL GLOVE WITH RECYCLED POLYESTER LINER

A very flexible thermal glove with rPET liner and nitrile foam knuckle coating to work in oily and wet conditions. Touchscreen capabilities and 360 degree water repellent treatment.

FEATURES

- › Soft and lightweight liner made of 50% recycled polyester and 50% virgin polyester
- › Flexible and durable nitrile foam knuckle coating guarantee a secure grip in wet and oily conditions
- › Light acrylic inner liner provides thermal insulation
- › 360 degree water repellent treatment to protect from liquids
- › Touchscreen capabilities to allow usage with screen devices
- › Close-fitting liner for a comfortable wearing experience
- › Elasticated wrist provides a secure fit
- › RCS (Recycled claim Standard) certified
- › 1 pair = 1PET bottle of 500ml recycled
- › 18g of CO₂ reduced vs virgin polyester alternative



SUITABLE FOR

Typical Industries

- Cold Storage
- Construction
- Logistics
- Manufacturing
- Oil and Gas
- Utilities

Suitable Applications

- Goods Handling
- Groundworks
- Labouring
- Outdoor Maintenance
- Public Works
- Yard Work

CERTIFICATION

CAT II



EN 388:2016 + A1:2018



3331B

EN511: 2006



X2X

ANSI/ISEA 105



See overleaf for explanation

**PRODUCTION INFORMATION**

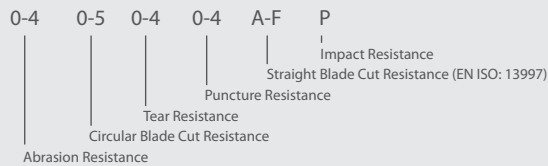
MATERIALS	LINER:	13 gauge 50% recycled polyester (rPET) / 50% virgin polyester
	COATING:	Nitrile foam
COLOUR	Green/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS


SIZE	CODE	PACKAGING
6/XS	SKG00052EB	5 pairs per paper wrap
7/S	SKG00052ED	
8/M	SKG00052EF	60 pairs per case
9/L	SKG00052EH	
10/XL	SKG00052EJ	
11/XXL	SKG00052EL	

RECOMMENDATIONS FOR USE

- **USE:** Cold resistant glove. Not suitable for thermal (heat), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**COLD HAZARDS EN 511****PERFORMANCE LEVELS****CLASSIFICATION FOR CUT RESISTANCE**

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS**EUROPE**www.globusgroup.com**E:** sales@globus.co.uk**T:** +44 (0)161 877 4747**F:** +44 (0)161 877 4746**MIDDLE EAST & AFRICA**www.globusgroup.com/gcc**E:** gcc@globusgroup.com**T:** +971 4 882 9962**F:** +971 4 882 9963**GLOBUS AMERICAS**www.globusgroup.com**E:** americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-BRONZE-1123,1

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.