

SKYTEC™ | Tons TP-5

CUT RESISTANT GLOVE WITH POLYURETHANE PALM COATING AND RECYCLED POLYESTER

From the TONS range, with very good mechanical resistance and excellent cut protection.

FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Durable palm coating resists rips and abrasion
- › Excellent grip in dry handling conditions
- › Flexible close-fitting design for a comfortable wearing experience
- › Breathable and lightweight
- › Knitwrist cuff style
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 1PET bottle of 500ml recycled



CUT LEVEL D

VENDING MACHINE COMPATIBLE

RECYCLED 100 claim standard

ECO

SUITABLE FOR

- | | |
|---|---|
| <p>Typical Industries</p> <ul style="list-style-type: none"> ▪ Automotive ▪ Construction ▪ Engineering ▪ Logistics ▪ Metals ▪ Waste Management | <p>Suitable Applications</p> <ul style="list-style-type: none"> ▪ Glass Handling ▪ Injection Moulding ▪ Metal Fabrication ▪ Waste Management |
|---|---|

CERTIFICATION

<p>CAT II</p>	<p>EN 388:2016</p> <p>4X43D</p>	<p>ANSI/ISEA 105</p>
<p>See overleaf for explanation</p>		



Tons TP-5

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE, glass fibre, recycled polyester
	COATING:	Polyurethane (PU)
COLOUR	Grey / Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	TNS0600	10 pairs per bag
7/S	TNS0601	
8/M	TNS0602	
9/L	TNS0603	120 pairs per case
10/XL	TNS0604	
11/XXL	TNS0605	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

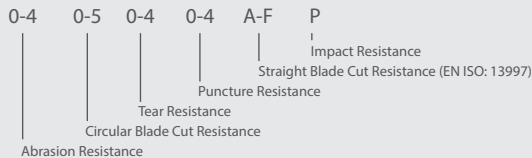

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-TONS-TP5-1123,1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.