

THIN AND FLEXIBLE FULLY COATED INSULATED GLOVE WITH HIGH CUT PROTECTION

Lightweight, fleece-lined cut resistant glove with a breathable microporous nitrile coating providing excellent grip in dry and wet conditions.

FEATURES

- › Cut resistance : Level F (EN388:2016) / ANSI A6
- › Fully dipped nitril foam allowing good grip in wet and dry conditions
- › Soft fleece lining for comfort in cold conditions
- › Durable and lightweight coating ensures glove longevity in abrasive applications
- › Good 360-degree breathability
- › Ultra fine coating for maximum tactile sensitivity
- › Touchscreen capabilities to allow usage with screen devices
- › Minimized particle shedding
- › Sanitised® antimicrobial finish provides extra freshness
- › Hand conforming fit for a second skin feel



SUITABLE FOR

Typical Industries

- Cold Storage
- Construction
- Logistics
- Manufacturing
- Utilities

Suitable Applications

- Goods Handling
- Groundworks
- Labouring
- Outdoor Maintenance
- Deliveries
- Yard Work

CERTIFICATION

CAT II	EN 388:2016	EN511:2006	EN407:2020	ANSI/ISEA 105
				
	4X43F	X10	X2XXXX	

See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Cut resistant liner, acrylic
	COATING:	Microporous nitrile
COLOUR	Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00097FD	10 pairs per paper wrap
8/M	SKG00097FF	
9/L	SKG00097FH	
10/XL	SKG00097FJ	
11/XXL	SKG00097FL	120 pairs per case


RECOMMENDATIONS FOR USE

- USE: Cold and cut resistant glove. Not suitable for thermal (heat above 250°C), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

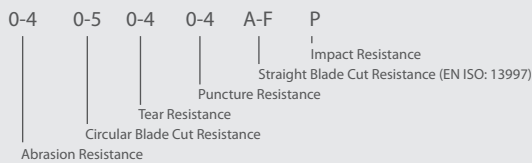


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



COLD HAZARDS EN 511



HEAT AND FIRE EN 407

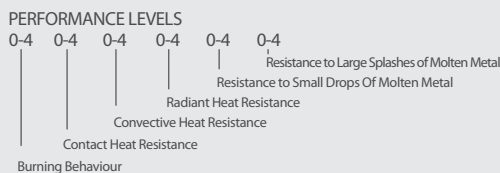

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-TROMSO+_1123_1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.