



Sapphire Garnet™

PALM COATED LATEX WITH A CUT RESISTANT ARAMID LINER

A flexible easy-maintenance glove providing effective protection against cuts and with excellent dry and wet grip.

FEATURES

- › Cut resistant: Level C (EN 388:2016) / A3
- › Rough finish to latex coated palm
- › Excellent mechanical performance
- › Latex protects the hand in damp environments
- › Breathable back of hand to reduce perspiration
- › Designed for easy movement and continuous wear
- › Seamless liner prevents irritation
- › Suitable for contact heat resistance up to 250°C (approx. 15 seconds)



SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Construction
- Glass
- Mechanical
- Metallurgy
- Public Utilities

Suitable Applications

- Bodywork
- Fabrication
- Glass Handling
- Masonry
- Recycling
- Tiling
- Waste Handling

CERTIFICATION



EN 388:2016 + A1:2018



3X44C

EN 407:2020



X2XXXX

ANSI/ISEA 105



See overleaf for explanation



Sapphire Garnet™

PRODUCTION INFORMATION

MATERIALS	LINER:	10 gauge para aramid
	COATING:	Natural latex
COLOUR	Yellow/blue	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00062CD	10 pairs per paper wrap
8/M	SKG00062CF	
9/L	SKG00062CH	
10/XL	SKG00062CJ	
11/XXL	SKG00062CL	120 pairs per case


RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal (beyond 250°C / 482°F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

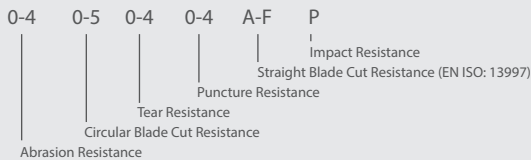


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

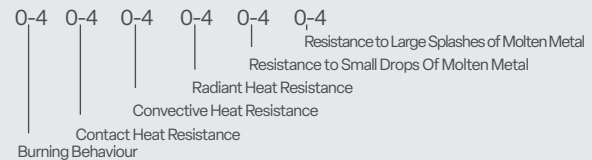

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LV, United Kingdom. [UK Approved Body No. 1105].

© 2023 Globus (Shetland) Ltd | SKY-DATA-SAPP-GARNET-1023,1

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.