

HIGH CUT RESISTANT IMPACT GLOVE WITH ROBUST AND FLEXIBLE IMPACT PANEL

A flexible seamless impact cut resistant glove level F/A6 with sandy nitrile on the palm to maximize grip. Ergonomic TPR design allows outstanding flexibility

FEATURES

- › Cut resistance: level F (EN388:2016) / ANSI A6
- › 13 gauge (HPPE, steel) liner offers great dexterity for fine handling
- › Excellent grip with a nitrile foam sandy coating on the palm
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb and back of hand
- › Reinforced thumb crotch enhances durability
- › Ergonomically designed TPR follow the hand movement reducing hand fatigue
- › TPR zones are sewn to the liner for increased resistance
- › Elasticated wrist provides a secure fit
- › Contact heat protection up to 100°C / 212°F for a short period (15 sec max)



SUITABLE FOR


Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

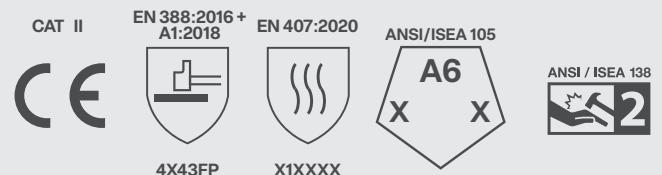

See overleaf for explanation

PRODUCTION INFORMATION		
MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Foam nitrile
COLOUR	Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

- | RECOMMENDATIONS FOR USE |
|--|
| <ul style="list-style-type: none"> USE: General handling glove with cut and impact protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement STORAGE: Store in dry conditions in the original packaging and away from direct sunlight CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use |

ORDERING DETAILS		
SIZE	CODE	PACKAGING
7/S	SKG00082FD	10 pairs per bag
8/M	SKG00082FF	
9/L	SKG00082FH	60 pairs per case
10/XL	SKG00082FJ	
11/XXL	SKG00082FL	
12/XXXL	SKG00082FN	

CERTIFICATION LEGENDS																																													
<div style="border: 1px solid #ccc; padding: 10px;"> <p>MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*</p> <table style="width: 100%; text-align: center;"> <tr> <td>0-4</td> <td>0-5</td> <td>0-4</td> <td>0-4</td> <td>A-F</td> <td>P</td> </tr> <tr> <td colspan="2">Abrasion Resistance</td> <td colspan="2">Circular Blade Cut Resistance</td> <td colspan="2">Impact Resistance</td> </tr> <tr> <td colspan="3">Tear Resistance</td> <td colspan="3">Straight Blade Cut Resistance (EN ISO: 13997)</td> </tr> <tr> <td colspan="4">Puncture Resistance</td> <td colspan="2"></td> </tr> </table> <p><small>*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter</small></p> </div>	0-4	0-5	0-4	0-4	A-F	P	Abrasion Resistance		Circular Blade Cut Resistance		Impact Resistance		Tear Resistance			Straight Blade Cut Resistance (EN ISO: 13997)			Puncture Resistance						<div style="border: 1px solid #ccc; padding: 10px;"> <p style="text-align: center;">CLASSIFICATION FOR CUT RESISTANCE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Measured breakthrough time</th> <th>Permeation performance index (grams)</th> </tr> </thead> <tbody> <tr><td>A1</td><td>≥ 200</td></tr> <tr><td>A2</td><td>≥ 500</td></tr> <tr><td>A3</td><td>≥ 1000</td></tr> <tr><td>A4</td><td>≥ 1500</td></tr> <tr><td>A5</td><td>≥ 2200</td></tr> <tr><td>A6</td><td>≥ 3000</td></tr> <tr><td>A7</td><td>≥ 4000</td></tr> <tr><td>A8</td><td>≥ 5000</td></tr> <tr><td>A9</td><td>> 6000</td></tr> </tbody> </table> </div>	Measured breakthrough time	Permeation performance index (grams)	A1	≥ 200	A2	≥ 500	A3	≥ 1000	A4	≥ 1500	A5	≥ 2200	A6	≥ 3000	A7	≥ 4000	A8	≥ 5000	A9	> 6000
0-4	0-5	0-4	0-4	A-F	P																																								
Abrasion Resistance		Circular Blade Cut Resistance		Impact Resistance																																									
Tear Resistance			Straight Blade Cut Resistance (EN ISO: 13997)																																										
Puncture Resistance																																													
Measured breakthrough time	Permeation performance index (grams)																																												
A1	≥ 200																																												
A2	≥ 500																																												
A3	≥ 1000																																												
A4	≥ 1500																																												
A5	≥ 2200																																												
A6	≥ 3000																																												
A7	≥ 4000																																												
A8	≥ 5000																																												
A9	> 6000																																												
<div style="border: 1px solid #ccc; padding: 10px;"> <p>HEAT AND FIRE EN 407 PERFORMANCE LEVELS</p> <table style="width: 100%; text-align: center;"> <tr> <td>0-4</td> <td>0-4</td> <td>0-4</td> <td>0-4</td> <td>0-4</td> <td>0-4</td> </tr> <tr> <td colspan="2">Contact Heat Resistance</td> <td colspan="2">Convective Heat Resistance</td> <td colspan="2">Radiant Heat Resistance</td> </tr> <tr> <td colspan="3">Burning Behaviour</td> <td colspan="3">Resistance to Small Drops Of Molten Metal</td> </tr> <tr> <td colspan="3"></td> <td colspan="3">Resistance to Large Splashes of Molten Metal</td> </tr> </table> </div>	0-4	0-4	0-4	0-4	0-4	0-4	Contact Heat Resistance		Convective Heat Resistance		Radiant Heat Resistance		Burning Behaviour			Resistance to Small Drops Of Molten Metal						Resistance to Large Splashes of Molten Metal			<div style="border: 1px solid #ccc; padding: 10px;"> <p style="text-align: center;">CLASSIFICATION FOR IMPACT RESISTANCE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Performance level</th> <th>Mean (kJ)</th> <th>All impacts (kJ)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>≤ 9</td> <td>< 11.3</td> </tr> <tr> <td>2</td> <td>≤ 6.5</td> <td>≤ 8.1</td> </tr> <tr> <td>3</td> <td>≤ 4</td> <td>≤ 5</td> </tr> </tbody> </table> </div>	Performance level	Mean (kJ)	All impacts (kJ)	1	≤ 9	< 11.3	2	≤ 6.5	≤ 8.1	3	≤ 4	≤ 5								
0-4	0-4	0-4	0-4	0-4	0-4																																								
Contact Heat Resistance		Convective Heat Resistance		Radiant Heat Resistance																																									
Burning Behaviour			Resistance to Small Drops Of Molten Metal																																										
			Resistance to Large Splashes of Molten Metal																																										
Performance level	Mean (kJ)	All impacts (kJ)																																											
1	≤ 9	< 11.3																																											
2	≤ 6.5	≤ 8.1																																											
3	≤ 4	≤ 5																																											

GLOBUS

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS
www.globusgroup.com
E: americas@globusgroup.com