


HIGH CUT RESISTANT UNCOATED GLOVE MADE WITH ENGINEERED HPPE

Glass and steel fibre free uncoated gloves offering high cut protection. Can be used as an under glove or worn by itself.

FEATURES

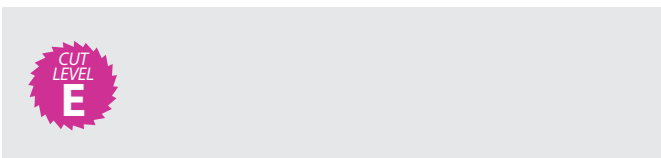


- › Cut resistant: Level E (EN 388:2016) / A5
- › Engineered HPPE offers outstanding cut protection
- › Glass and steel fibre free reduce risks of irritation
- › Spandex in the liner allows the glove to fit the hand perfectly
- › Designed for easy movement and continuous wear
- › Breathable to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit
- › Ambidextrous for easy and quick donning



SUITABLE FOR

- | | |
|--|---|
| <p>Typical Industries</p> <ul style="list-style-type: none"> ▪ Automotive ▪ Clean room ▪ Manufacturing ▪ electronics ▪ Aerospace | <p>Suitable Applications</p> <ul style="list-style-type: none"> ▪ Surface control ▪ Dry conditions works with risks of cut ▪ Can be worn under a disposable glove or chemical glove |
|--|---|

CERTIFICATION

<p>CAT II</p> 	<p>EN 388:2016 + A1:2018</p>  <p>2X43E</p>	<p>ANSI/ISEA 105</p> 
<p>See overleaf for explanation</p>		



Sapphire Zinc™

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE
	COATING:	Uncoated
COLOUR	Grey	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00086FB	10 pairs per paper wrap
7/S	SKG00086FD	
8/M	SKG00086FF	
9/L	SKG00086FH	
10/XL	SKG00086FJ	120 pairs per case
11/XXL	SKG00086FL	

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

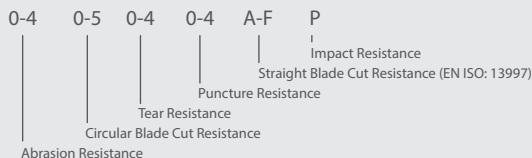

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-SAPP-ZINC-1123,1

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LV, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.