



Sapphire Xtreme

FLEXIBLE GLOVE WITH LEVEL E CUT RESISTANCE

A flexible, lightweight glove with high cut resistance. 15gg ultra fine high cut resistance liner with a nitrile foam finish palm coating and a reinforced thumb crotch.

FEATURES

- › Cut resistant: Level E / ANSI A5
- › Soft and durable for long lasting comfort
- › Resistant to contact heat up to 100°C
- › Breathable liner helps keep hands cool
- › Ergonomically designed for a superior fit
- › Seamless liner prevents irritation
- › Flexible with a high level of dexterity
- › Excellent abrasion resistance allows for long term use
- › Special micro form coating provides excellent dry, wet and oily grip



SUITABLE FOR


Typical Industries

- Aerospace
- Automotive
- Ceramics
- Construction
- Engineering
- Glass
- Plastics

Suitable Applications

- Bodyshop
- Handling Materials with Sharp Edges
- Injection Moulding
- Metal Fabrication

CERTIFICATION

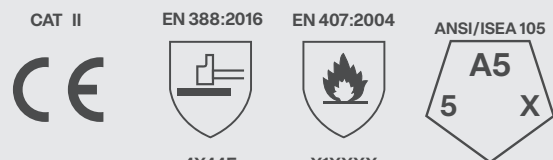

See overleaf for explanation



Sapphire Xtreme

PRODUCTION INFORMATION

MATERIALS	LINER:	15 gauge HPPE, steel & glass fibre, nylon, spandex
	COATING:	–
COLOUR	Black/Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for high thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKY1030	10 pairs per paper wrap
7/S	SKY1031	
8/M	SKY1032	
9/L	SKY1033	
10/XL	SKY1034	120 pairs per case
11/XXL	SKY1035	

CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

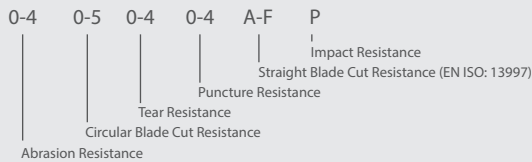

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

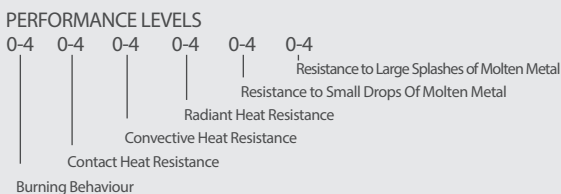

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-SAPP-XTREME-1123,1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.