

**ULTRA LIGHTWEIGHT GLASS FIBRE FREE MEDIUM CUT RESISTANT GLOVE WITH NITRILE FOAM KNUCKLE COATING**

A second skin cut resistant glove, thin, soft and comfortable allowing high dexterity tasks. Coating over the fingers to protect from oils and liquids.

FEATURES

- › Good cut resistance: Level C / ANSI A3
- › 18 gauge seamless liner offers flexibility, comfort and high fingertip sensitivity
- › Glass and steel fibre free reduce risks of irritation
- › Foam nitrile coating gives exceptional grip while allowing warm air and moisture from inside to escape, keeping hands dry and comfortable
- › Reinforced thumb crotch enhances durability
- › Touchscreen capabilities to allow usage with screen devices
- › Designed for easy movement and continuous wear
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit

**OIL GRIP****SUITABLE FOR****Typical Industries**

- Automotive
- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport


Suitable Applications

- Assembly
- Handling Sharp and Greasy Parts
- Machining
- Bodywork
- Precision Mechanics

CERTIFICATIONEN 388:2016 +
A1:2018

4X42C

ANSI/ISEA 105



See overleaf for explanation



Sapphire Aero +

PRODUCTION INFORMATION

MATERIALS	LINER:	18g HPPE
	COATING:	Nitrile foam
COLOUR	Grey/Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Knitted	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for heat, thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.


ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00042FD	10 pairs per bag
8/M	SKG00042FF	
9/L	SKG00042FH	
10/XL	SKG00042FJ	
11/XXL	SKG00042FL	120 pairs per case

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

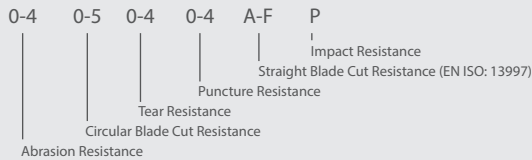

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)