



# NINJA X4™

ALSO KNOWN AS SAPPHIRE X4™

## CUT RESISTANCE WITH A BI-POLYMER PALM

A supple and lightweight glove providing a good level of cut resistance, dexterity and comfort. The bi-polymer coating delivers excellent grip in both wet and dry handling conditions.

### FEATURES

- › Cut resistant: Level B (EN 388:2016)
- › High resistance to abrasion
- › Breathable liner
- › Silicone free
- › Elasticated wrist provides a secure fit
- › Mottled grey and black colouring helps to extend wearable life
- › Sanitized® antimicrobial finish provides extra freshness



### SUITABLE FOR

#### Typical Industries

- Engineering
- Glass
- Packaging

#### Suitable Applications

- Assembly
- Bottling or Canning
- General handling

### CERTIFICATION



See overleaf for explanation



# NINJA X4™

ALSO KNOWN AS SAPPHIRE X4™

## PRODUCT INFORMATION

<b>MATERIALS</b>	LINER:	13 gauge nylon, glass fibre
	COATING:	Bi-Polymer
<b>COLOUR</b>	Grey/Black	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


## ORDERING DETAILS

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
7/S	SKY031	10 pairs per bag	SKYV031	120 individually bagged pairs per case
8/M	SKY032		SKYV032	
9/L	SKY033		SKYV033	
10/XL	SKY034	120 pairs per case	SKYV034	
11/XXL	SKY035		SKYV035	

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

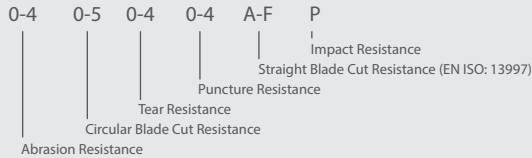

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

### GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [americas@globusgroup.com](mailto:americas@globusgroup.com)



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | SKY-DATA-NINJA-X4-0722\_1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).  
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.