

ROBUST IMPACT PROTECTION GLOVE WITH HIGH CUT PROTECTION

Heavy duty impact resistant glove with high cut protection offering outstanding grip in wet and oily environments. High-Vis for efficient hand signalling in poorly lit conditions.

FEATURES

- › Cut resistant: Level F / ANSI A6
- › Outstanding grip in dry, wet or oily environments
- › Double-stitched Kevlar® thread to bolster high wear areas with a cut-resistant aramid palm lining
- › Breathable foam laminated stretch spandex suitable for year-round comfort
- › Synthetic leather palm and fourchettes
- › Continuous impact panel for full coverage protection
- › Spandex and neoprene wrist for easy donning and doffing
- › Pull tab with ID tag
- › Hi-vis colour for efficient hand signalling
- › Anatomically curved finger design helps prevent hand fatigue



SUITABLE FOR


Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

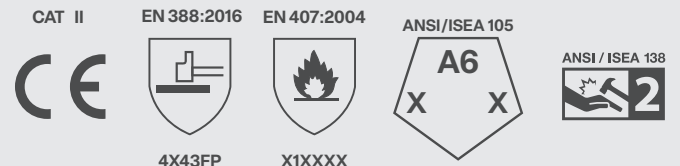

See overleaf for explanation

PRODUCTION INFORMATION		
MATERIALS	LINER:	Polyester Fabric Laminated Spandex with TPR
	COATING:	Synthetic leather, aramid lining and grippy material
COLOUR	Yellow/Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Loose neoprene cuff	

RECOMMENDATIONS FOR USE
<ul style="list-style-type: none"> USE: General handling glove with cut and impact protection. Not suitable for high contact heat (beyond 100°C / 212°F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement. STORAGE: Store in dry conditions in the original packaging and away from direct sunlight. CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of the user to ensure the glove is suitable for its intended use

ORDERING DETAILS		
SIZE	CODE	PACKAGING
8/M	SKG00005CF	10 pairs per bag
9/L	SKG00005CH	
10/XL	SKG00005CJ	60 pairs per case
11/XXL	SKG00005CL	
12/XXXL	SKG00005CN	
13/XXXXL	SKG00005CP	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance	Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Straight Blade Cut Resistance (EN ISO: 13997)	Impact Resistance

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

HEAT AND FIRE EN 407

PERFORMANCE LEVELS	Resistance to Large Splashes of Molten Metal	Resistance to Small Drops Of Molten Metal	Radiant Heat Resistance	Convective Heat Resistance	Contact Heat Resistance	Burning Behaviour
0-4	0-4	0-4	0-4	0-4	0-4	

CLASSIFICATION FOR IMPACT RESISTANCE

Performance level	Mean (kJ)	All impacts (kJ)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

GLOBUS

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS
www.globusgroup.com
E: americas@globusgroup.com

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.