

ANTISTATIC SINGLE USE GLOVE, 100% NITRILE, POWDER FREE, SILICONE FREE, 300MM LONG, 0.16MM THICK

Premium performance, powder-free, extended cuff nitrile single use glove with antistatic properties (ESD). Extremely strong and high resistance to chemicals.

FEATURES

- › High quality nitrile, soft and durable
- › Palm thickness 0.16mm (6 mil), weight : 9.1g size M
- › High resistance to penetration and projections of many chemicals
- › Extended cuff (300mm length) to protect the forearm
- › Textured finish on fingertips to enhance grip
- › Powder-free, latex free, non-sterile, AQL 1.5
- › Double Chlorinated inside and outside to offer more comfort, low tack and reduce friction when donning
- › Antistatic properties according to EN 16350:2014 : vertical resistance $14.5 \times 10^6 \Omega$
- › Eliminates static charge buildup to help prevent sparks and flareups in flammable environment
- › Silicone free to allow usage in bonding / painting operations (paints, coatings, primers, adhesive)



SUITABLE FOR


Typical Industries

- Chemicals
- Electronics
- Manufacturing
- Oil and Gas
- Pharmaceutical
- Repair and Finishing

Suitable Applications

- Chemical Handling
- Handling Oily Components
- Laboratory Analysis
- Light Assembly
- Paint Spraying

CERTIFICATION

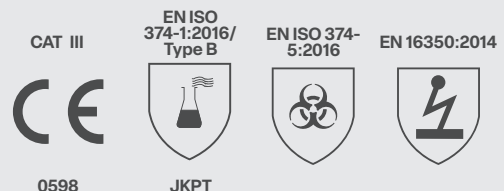

See overleaf for explanation

**PRODUCTION INFORMATION**

MATERIALS	LINER:	Nitrile
	COATING:	–
COLOUR	Black	
LENGTH (mm)	300 mm	
CUFF STYLE	Beaded	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00630BB	100 singles per box
7/S	SKG00630BD	
8/M	SKG00630BF	
9/L	SKG00630BH	10 boxes per case
10/XL	SKG00630BJ	
11/XXL	SKG00630BL	

RECOMMENDATIONS FOR USE

- **USE:** Single use glove. Not suitable for Mechanical, thermal, heat, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS

PROTECTION AGAINST
MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



EN16350:2014
ELECTROSTATIC
PROPERTIES



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%		
D	Dichloromethane	M	65% Nitric acid	B	≥30 min for at least 3 chemicals
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide	C	≥10 min for at least 1 chemical
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

GLOBUS**EUROPE**

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15N2P, Republic of Ireland. (Notified Body No. 2777)