



OUTSTANDING GRIP AND ABRASION RESISTANCE GLOVE

Ultra lightweight liner with an innovative coating providing superior grip and abrasion resistance

FEATURES

- › Genium™ is an eco friendly liner with 1/3 of the ingredients by weight that are sustainably sourced and that requires 30% less energy to be produced.
- › Crinkle effect on a nitrile foam providing outstanding grip in all conditions
- › Stretch with recovery around 2-3x greater than nylon
- › Superior abrasion resistance up to 60,000 cycles
- › No particle shedding
- › Super soft liner
- › Anatomically designed with moisture wicking to deliver great comfort
- › Sanitized® antimicrobial finish provides extra freshness
- › Light thermal protection up to 100°C for a short period



SUITABLE FOR


Typical Industries

- Automotive
- Logistics
- Maintenance
- Manufacturing
- Utilities

Suitable Applications

- Assembly
- Goods Handling
- Light Fabrication
- Quality Inspection
- Warehousing

CERTIFICATION

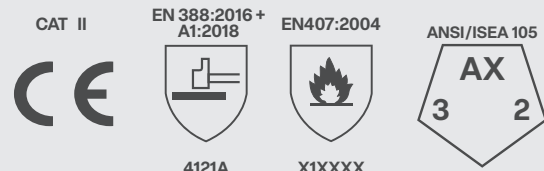

See overleaf for explanation

**PRODUCTION INFORMATION**


MATERIALS	LINER:	15 gauge Genium™, nylon, spandex
	COATING:	Foam crinkle nitrile
COLOUR	Red/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00019HB	10 pairs per paper wrap
7/S	SKG00019HD	
8/M	SKG00019HF	
9/L	SKG00019HH	
10/XL	SKG00019HJ	120 pairs per case
11/XXL	SKG00019HL	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for high thermal (beyond 100°C), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

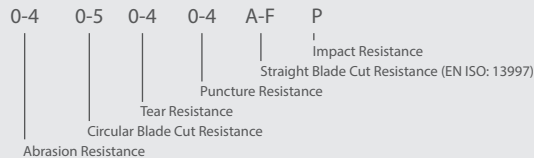CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS**EUROPE**

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).