



# Aria 360™

## NITRILE FOAM PALM WITH ECO FRIENDLY LINER AND TOUCH SCREEN CAPABILITIES

Lightweight nitrile foam glove with an outstanding durability and grip, eco friendly liner and touch screen capabilities.

### FEATURES

- › Genium™ is an eco friendly liner with 1/3 of the ingredients by weight that are sustainably sourced and that requires 30% less energy to be produced.
- › Touchscreen capability on thumb and index finger
- › Anatomically designed with moisture wicking to deliver great comfort
- › Excellent grip in all conditions (dry wet, oily)
- › Low particle shedding for sensitive applications
- › Super soft liner
- › Patented nitrile foam palm coating enhances protection
- › Sanitized® antimicrobial finish provides extra freshness
- › Light thermal protection up to 100°C for a short period



### SUITABLE FOR

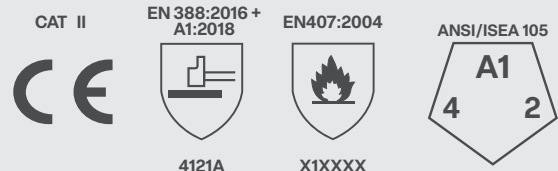
#### Typical Industries

- Automotive
- Logistics
- Maintenance
- Manufacturing
- Utilities

#### Suitable Applications

- Assembly
- Goods Handling
- Light Fabrication
- Quality Inspection
- Warehousing

### CERTIFICATION



See overleaf for explanation

**PRODUCTION INFORMATION**

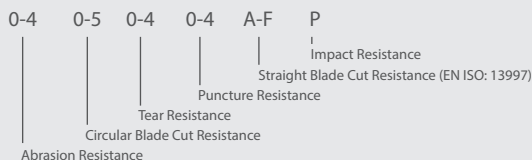
<b>MATERIALS</b>	LINER:	15 gauge Genium™, nylon, spandex
	COATING:	Foam nitrile
<b>COLOUR</b>	Grey / Black	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

**ORDERING DETAILS**

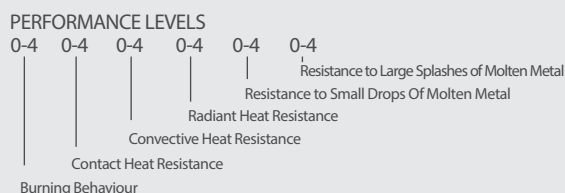
SIZE	CODE	PACKAGING
6/XS	SKG00022FB	10 pairs per bag
7/S	SKG00022FD	
8/M	SKG00022FF	
9/L	SKG00022FH	120 pairs per case
10/XL	SKG00022FJ	
11/XXL	SKG00022FL	

**RECOMMENDATIONS FOR USE**

- **USE:** General handling glove. Not suitable for high thermal (beyond 100°C), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

**CERTIFICATION LEGENDS****MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\***

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**HEAT AND FIRE EN 407****CLASSIFICATION FOR CUT RESISTANCE**

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

**ANSI/ISEA 105-2016 ABRASION RATING CHART**

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

**ANSI/ISEA PUNCTURE RESISTANCE**

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

**GLOBUS****EUROPE**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)

**T:** +44 (0)161 877 4747

**F:** +44 (0)161 877 4746

**MIDDLE EAST & AFRICA**

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

**T:** +971 4 882 9962

**F:** +971 4 882 9963

**GLOBUS AMERICAS**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15V2P, Republic of Ireland. (Notified Body No. 2777).