

A2 CUT RESISTANT CORDED COTTON IMPACT GLOVE

A cotton impact glove with cut protection. Requested by the oil industry for a decade, this glove gives wearers the best of both worlds. The palm that grips with grease and the protection the site demands.

FEATURES

- › Cut resistance: level B / ANSI A2
- › Classic corded cotton palm absorbs oil to give you a grip in greasy situations
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb and back of hand.
- › Ergonomically curved fingers to reduce hand fatigue
- › Dual layered thumb crotch/saddle for additional durability
- › Adjustable cuff for a custom fit
- › ANSI Level 2 Impact Protection
- › Contact Heat Resistant up to 250°C/482°F



SUITABLE FOR


Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

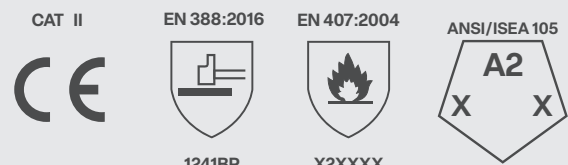

See overleaf for explanation

PRODUCTION INFORMATION		
MATERIALS	LINER:	Polyester Fabric Laminated Spandex with TPR
	COATING:	Corduroy (corded cotton) with cut resistant fabric
COLOUR	White/Orange	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist with Velcro® strap	

- ### RECOMMENDATIONS FOR USE
- USE: General handling glove with cut and impact protection. Not suitable for high thermal (Beyond 250C / 482F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
 - STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
 - CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
 - LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS		
SIZE	CODE	PACKAGING
8/M	SKG00025CF	10 pairs per bag
9/L	SKG00025CH	
10/XL	SKG00025CJ	60 pairs per case
11/XXL	SKG00025CL	
12/XXXL	SKG00025CN	
13/XXXXL	SKG00025CP	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Circular Blade Cut Resistance		Tear Resistance		Impact Resistance	
Abrasion Resistance			Straight Blade Cut Resistance (EN ISO: 13997)		
Puncture Resistance					

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

HEAT AND FIRE EN 407

PERFORMANCE LEVELS

0-4	0-4	0-4	0-4	0-4	0-4
Contact Heat Resistance		Convective Heat Resistance		Radiant Heat Resistance	
Burning Behaviour		Resistance to Small Drops Of Molten Metal		Resistance to Large Splashes of Molten Metal	

GLOBUS

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS
www.globusgroup.com
E: americas@globusgroup.com

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.