

**FLEXIBLE AND HEAVY DUTY WELDING GLOVE**

A long and reinforced welding glove for heavy duty applications featuring high mechanical and thermal properties.

**FEATURES**

- › Premium split cowhide leather makes the gloves strong and flexible
- › Weltd seams with Kevlar® thread increase durability
- › 3-Dimensional thumb crotch reinforcement protects high wear area for an extended life time
- › Cotton Jersey on palm and cotton denim on cuff provides a great comfort
- › 400mm length protects the full forearm
- › Maximum abrasion, tear and puncture resistance
- › Excellent thermal protection



**SUITABLE FOR**





**Typical Industries**

- Manufacturing
- Metal industry
- Utilities
- Automotive
- Construction

**Suitable Applications**

- Assembly
- Welding

**CERTIFICATION**

CAT II	EN388:2016 + A1:2018	EN 407:2004	EN12477:2001 + A1:2005
			
	4244B	412X3X	Type A

See overleaf for explanation

**PRODUCTION INFORMATION**

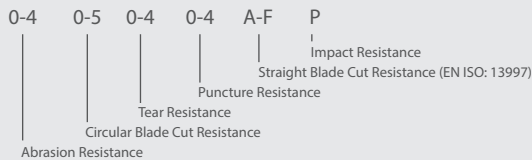
<b>MATERIALS</b>	LINER:	Cotton
	COATING:	Cowhide split leather, Kevlar® thread
<b>COLOUR</b>	Golden	
<b>LENGTH (mm)</b>	400	
<b>CUFF STYLE</b>	-	

**ORDERING DETAILS**

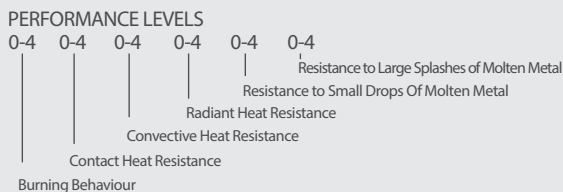
SIZE	CODE	PACKAGING
9/L 10/XL	SKG00029HH SKG00029HJ	6 pairs per bag  36 pairs per case

**RECOMMENDATIONS FOR USE**

- **USE:** Thermal / welding resistant glove. Not suitable for chemical or electrical protection. Do not use near moving machines if there is a risk of entanglement.
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight.
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

**CERTIFICATION LEGENDS****MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\***

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**HEAT AND FIRE EN 407****CLASSIFICATION FOR CUT RESISTANCE**

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

**GLOBUS****EUROPE**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)

**T:** +44 (0)161 877 4747

**F:** +44 (0)161 877 4746

**MIDDLE EAST & AFRICA**

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

**T:** +971 4 882 9962

**F:** +971 4 882 9963

**GLOBUS AMERICAS**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)