



Sapphire Nano™

ULTRA-THIN CUT RESISTANT GLOVE WITH PU COATING

As the thinnest option available on the market with a high cut resistance (level D), Sapphire Nano offers an outstanding level of tactility to perform extreme precision tasks. With a PU-coated palm, the second skin feeling has never been better.

FEATURES

- › Medium to high cut resistance: Level D / ANSI A4
- › 21 gauge seamless liner offers unprecedented level of fingertip sensitivity for precision tasks
- › Durable polyurethane palm coating ensures good protection against abrasion
- › Reinforced thumb crotch enhances durability
- › Touchscreen capabilities to allow usage with screen devices
- › Designed for easy movement and continuous wear
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



SUITABLE FOR


Typical Industries

- Automotive
- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport

Suitable Applications

- Assembly
- Handling Sharp and Greasy Parts
- Machining
- Bodywork
- Precision Mechanics

CERTIFICATION

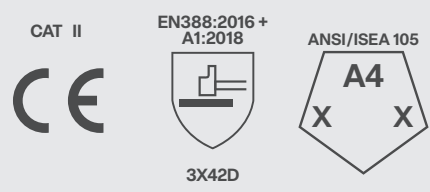

See overleaf for explanation



Sapphire Nano™

PRODUCTION INFORMATION

MATERIALS	LINER:	21g HPPE, steel, nylon
	COATING:	Polyurethane
COLOUR	Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00033FB	10 pairs per bag
7/S	SKG00033FD	
8/M	SKG00033FF	120 pairs per case
9/L	SKG00033FH	
10/XL	SKG00033FJ	
11/XXL	SKG00033FL	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for heat, thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance	Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Straight Blade Cut Resistance (EN ISO: 13997)	Impact Resistance

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15N2P, Republic of Ireland. (Notified Body No. 2777).