Superfan, Ceiling fan by Michael Anastassiades

kettal


1/5


cm/inch

Superfan is a tri-blade fan whose geometry is simply defined through three angled blades, meeting at the rotating axis.

All design decisions are made to maximise performance and improve efficiency: the angle of the blades, the lightness of the aluminium material and the selection of the motor for accurate speed control and quiet function.

The two fan versions operate with equal efficiency both with and without a pendant, offering flexibility of use for different ceiling heights.

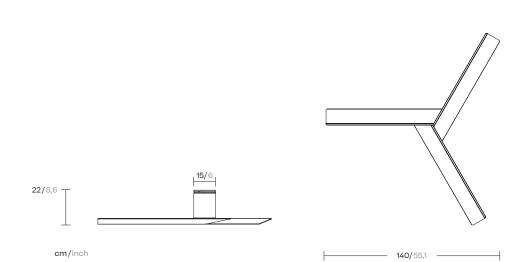

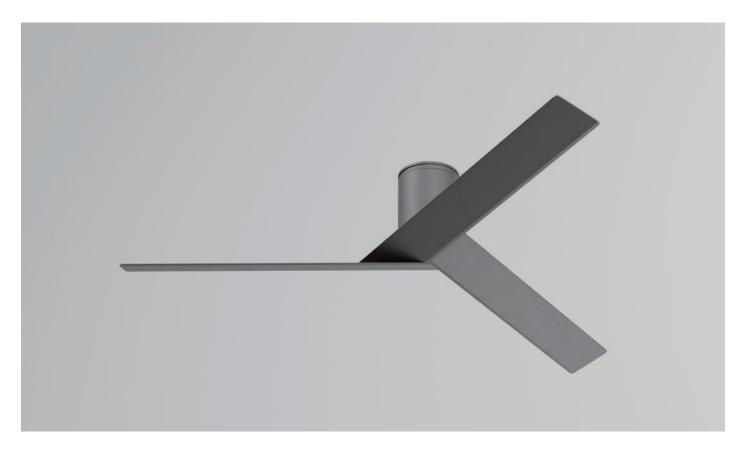

kettal

Technical info

Fixation	Ceiling
Engine type	Super silence motor BLDC (brushless direct current)
No. of speeds	6-speed selection
IP	44
Voltage	220-240, 2A
Hertz	50/50 Hz
Weight	7,5 kg (16,5 lbs). It must be installed on a structure capable of supporting 30kg (66lbs)
Max. Power consumtion	Less than 35W
RPM	?
Type of control included	Remote control / Fan reverse function control
No. of blades	3
Body/Structure	Aluminium









∠! Warning



Rotating fan blades.

Can cause serious injury or cut.

Keep hands clear.


Safety stop. If something gets in the way of the blades, the fan stops



Collection Superfan Reference KSA900100

3/5

Fan location



Ceiling fan

Allow a minimum clearance of 2,1 m (7 ft) for USA and 2,3 m (7,5 ft) for Europe from the floor to the blades and 30 inches (76 cm) from the wall to the end of the blades.

4/5

Materials

Aluminium Antioxy, Heavy Load, Resistant En-1421, Kettalize-It, Anti-Scratch, Easy Clean, Flame Retardant M1, Eco Friendly Ecoembes Recycling Process

Maintenance

Clean with mild soap using sponge or cloth. Be gentle while cleaning, do not scrub aggressively the fabric. Once cleaned please make sure you remove soap excess. In case of aggressive stains clean with diluted household bleach.

Clean stains promptly. The longer it remains, more difficult will be to remove.

Once cleaned the fabric steam iron the fabric. Just use steam, be carefull NOT placeing the iron directly in the fabric it will get damage.

33C

30C

31C

32C

Frame Colour Options Terrain Coatings Slate Stone Mysty Smoke Ash Tuff 01C 03C 05C 02C 04C Wet Stone Sand Dune Dry Clay Arabica Sepia 19C 06C 07C 08C 09C Rose Canyon Blossom **Ruby Dust** Sunset Glow Terrarosa Ginger Root Terracota Amber Desert Storm African Savannah 14C 13C 12C 11C Spring Meadow Kombu Forest Stream Sea Moss Glacier Ice 28C 29C 27C 26C 25C Wild Lupin Polar Sky Nightfall Indigo 24C 23C 22C 21C Galena Bronze Corten Manganese

5/5

Colour Options

Aluwood







Western Red Cedar 920



Smoked Wenge 910