



Datasheet **ValkDouble** | **ValkTriple** | **ValkQuattro**


Solar ramp

- By smart panel configuration up to 100% more panels per surface.
- Suitable for expansion roofs, ground mount, garage boxes or apartment buildings.
- Available in three variants: ValkDouble (2 panels), ValkTriple (3 panels) and ValkQuattro (4 panels).
- Height: ValkDouble approx. 502 mm, ValkTriple approx. 678 mm, ValkQuattro approx. 860 mm.

Extension kit


To accommodate panels from 1065 to 1134 mm at the ValkDouble, ValkTriple (for ValkQuattro from 1065 till 1100 mm), these should be extended. For this you need an extension kit for every solar ramp.

Hole pattern

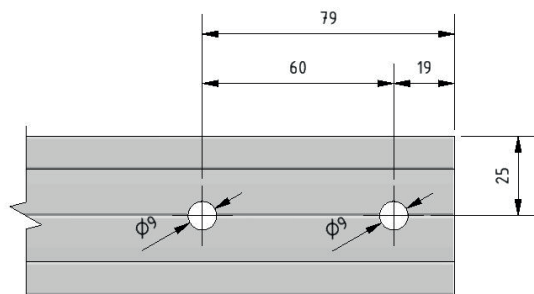


- In the case of the already existing aluminum profiles of the solar ramp, be sure to drill two holes (Ø 9 mm) per profile at the end of the profile in accordance with the above hole pattern to fit the extension set.

Articles




Aluminium profile



Aluminium coupling piece



SS tap bolt



SS flange nut

Advice pitch

	ValkDouble	ValkTriple	ValkQuattro
Advice pitch (angle inclination 14,5°)	3300 mm	5000 mm	6700 mm
Distance between rows	1120 mm	1870 mm	2610 mm
Dimensions of systems (mm, l x pl* x h)	2180 x pl* x 540	3130 x pl* x 720	4090 x pl* x 900

*pl = Panellenght

Article overview

ValkDouble ValkTriple ValkQuattro	
Article number	Description
757008	ValkDouble - 2 panels landscape - 10°
757010	ValkTriple - 3 panels landscape - 10°
757012	ValkQuattro - 4 panels landscape - 10°
757052*	Extension kit solar ramp
* For panels with a width 1065 - 1134 mm ValkDouble and ValkTriple - ValkQuattro 1065 - 1100 mm.	

CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS



Datasheet **ValkDouble** | **ValkTriple** | **ValkQuattro**

Solar ramp

Maximum panel width of the solar ramps bij application of the 721550(ZW) and 721552(ZW) clamps for panels with a frame.

	Total length without extension kit (757050 - Extension kit solar ramp - panel width 1010-1046mm)	Max. panel width
ValkDouble	2098	1.014 mm
ValkTriple	3109	1.010 mm
ValkQuattro	4120	1.008 mm


	Total length incl. extension kit (757050 - Extension kit solar ramp - panel width 1010-1046mm)	Max. panel width
ValkDouble	2248	1.089 mm
ValkTriple	3259	1.060 mm
ValkQuattro	4270	1.045 mm

	Total length incl. extension kit medium (757051 - Extension kit solar ramp - panel width 1038-1065mm)	Max. panel width
ValkDouble	2298	1.114 mm
ValkTriple	3309	1.076 mm
ValkQuattro	4320	1.058 mm

	Total length incl. extension kit long (757051 - Extension kit solar ramp - panel width 1065-1100mm)	Max. panel width
ValkDouble	2478	1.204 mm
ValkTriple	3489	1.136 mm
ValkQuattro	4500	1.103 mm

Please note by the ValkTriple and ValkQuattro 2 holes have to be drilled manually on the side of the extension kit in the 7271010 profile.

The center from the end of the profile at 19 mm and 79 mm with a cross section of Ø 9 mm.

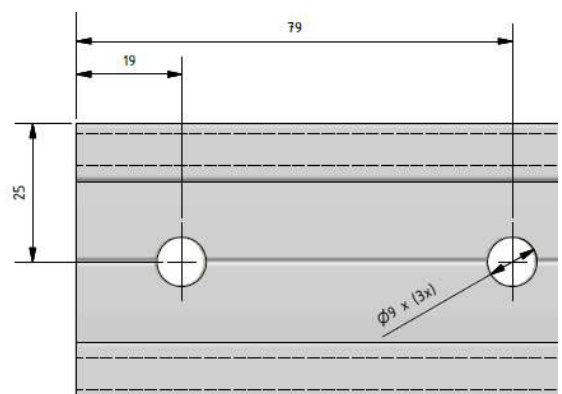

CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS

Van der Valk Solar Systems + International
 Westernesse 18 - 2635 BG Den Hoorn, The Netherlands
 +31 174 25 49 99
sales@valksolarsystems.com

Valk Solar Systems UK + IE
 +44 1304 89 76 58
sales@valksolarsystems.co.uk

Valk Solar Systems Ibérica
 +34 699 326 544
ventas@valksolarsystems.es

Valk Solar Systems Nordics
 +46 7 25 27 00 66
sales@valksolarsystems.se