



# Chip Inductors - 0805CS (2012)

- Exceptional Q values, even at high frequencies
- Tight tolerances – 2% for most; 1% for some values
- Wirewound construction provides the highest SRFs in 0805 size

| Part number <sup>1</sup> | Inductance <sup>2</sup><br>(nH) | Percent<br>tolerance <sup>3</sup> | Q min <sup>4</sup> | SRF typ <sup>5</sup><br>(MHz) | DCR max <sup>6</sup><br>(Ohms) | Irms <sup>7</sup><br>(mA) | Color<br>code |
|--------------------------|---------------------------------|-----------------------------------|--------------------|-------------------------------|--------------------------------|---------------------------|---------------|
| 0805CS-020XJL_           | 2.8 @ 250 MHz                   | <b>5</b>                          | 80 @ 1500 MHz      | 12200                         | 0.06                           | 800                       | Gray          |
| 0805CS-3N0XJL_           | 3.0 @ 250 MHz                   | <b>5</b>                          | 65 @ 1500 MHz      | 12200                         | 0.06                           | 800                       | White         |
| 0805CS-030XJL_           | 3.3 @ 250 MHz                   | <b>5</b>                          | 50 @ 1500 MHz      | 12200                         | 0.08                           | 600                       | Black         |
| 0805CS-050XJL_           | 5.6 @ 250 MHz                   | <b>5</b>                          | 65 @ 1000 MHz      | 5900                          | 0.08                           | 600                       | Orange        |
| 0805CS-060XJL_           | 6.8 @ 250 MHz                   | <b>5</b>                          | 50 @ 1000 MHz      | 5600                          | 0.11                           | 600                       | Brown         |
| 0805CS-070XJL_           | 7.5 @ 250 MHz                   | <b>5</b>                          | 50 @ 1000 MHz      | 4800                          | 0.14                           | 600                       | Green         |
| 0805CS-080X_L_           | 8.2 @ 250 MHz                   | <b>5,2</b>                        | 50 @ 1000 MHz      | 4400                          | 0.12                           | 600                       | Red           |
| 0805CS-100X_L_           | 10 @ 250 MHz                    | <b>5,2</b>                        | 60 @ 500 MHz       | 4300                          | 0.10                           | 600                       | Blue          |
| 0805CS-120X_L_           | 12 @ 250 MHz                    | <b>5,2</b>                        | 50 @ 500 MHz       | 4000                          | 0.15                           | 600                       | Orange        |
| 0805CS-150X_L_           | 15 @ 250 MHz                    | <b>5,2</b>                        | 50 @ 500 MHz       | 3200                          | 0.17                           | 600                       | Yellow        |
| 0805CS-180X_L_           | 18 @ 250 MHz                    | <b>5,2</b>                        | 50 @ 500 MHz       | 3100                          | 0.20                           | 600                       | Green         |
| 0805CS-220X_L_           | 22 @ 250 MHz                    | <b>5,2</b>                        | 55 @ 500 MHz       | 2600                          | 0.22                           | 500                       | Blue          |
| 0805CS-240X_L_           | 24 @ 250 MHz                    | <b>5,2</b>                        | 50 @ 500 MHz       | 2400                          | 0.22                           | 500                       | Gray          |
| 0805CS-270X_L_           | 27 @ 250 MHz                    | <b>5,2</b>                        | 55 @ 500 MHz       | 2580                          | 0.25                           | 500                       | Violet        |
| 0805CS-330X_L_           | 33 @ 250 MHz                    | <b>5,2,1</b>                      | 60 @ 500 MHz       | 2150                          | 0.27                           | 500                       | Gray          |
| 0805CS-360X_L_           | 36 @ 250 MHz                    | <b>5,2,1</b>                      | 55 @ 500 MHz       | 1900                          | 0.27                           | 500                       | Orange        |
| 0805CS-390X_L_           | 39 @ 250 MHz                    | <b>5,2,1</b>                      | 60 @ 500 MHz       | 2000                          | 0.29                           | 500                       | White         |
| 0805CS-430X_L_           | 43 @ 200 MHz                    | <b>5,2,1</b>                      | 60 @ 500 MHz       | 1800                          | 0.34                           | 500                       | Yellow        |
| 0805CS-470X_L_           | 47 @ 200 MHz                    | <b>5,2,1</b>                      | 60 @ 500 MHz       | 1700                          | 0.31                           | 500                       | Black         |
| 0805CS-560X_L_           | 56 @ 200 MHz                    | <b>5,2,1</b>                      | 60 @ 500 MHz       | 1600                          | 0.34                           | 500                       | Brown         |
| 0805CS-680X_L_           | 68 @ 200 MHz                    | <b>5,2,1</b>                      | 60 @ 500 MHz       | 1500                          | 0.38                           | 500                       | Red           |
| 0805CS-820X_L_           | 82 @ 150 MHz                    | <b>5,2,1</b>                      | 65 @ 500 MHz       | 1330                          | 0.42                           | 400                       | Orange        |
| 0805CS-910X_L_           | 91 @ 150 MHz                    | <b>5,2,1</b>                      | 65 @ 500 MHz       | 1330                          | 0.48                           | 400                       | Black         |
| 0805CS-101X_L_           | 100 @ 150 MHz                   | <b>5,2,1</b>                      | 65 @ 500 MHz       | 1250                          | 0.46                           | 400                       | Yellow        |
| 0805CS-111X_L_           | 110 @ 150 MHz                   | <b>5,2</b>                        | 50 @ 250 MHz       | 1100                          | 0.48                           | 400                       | Brown         |
| 0805CS-121X_L_           | 120 @ 150 MHz                   | <b>5,2,1</b>                      | 50 @ 250 MHz       | 1100                          | 0.51                           | 400                       | Green         |
| 0805CS-151X_L_           | 150 @ 100 MHz                   | <b>5,2,1</b>                      | 50 @ 250 MHz       | 920                           | 0.56                           | 400                       | Blue          |
| 0805CS-181X_L_           | 180 @ 100 MHz                   | <b>5,2,1</b>                      | 50 @ 250 MHz       | 920                           | 0.64                           | 400                       | Violet        |
| 0805CS-221X_L_           | 220 @ 100 MHz                   | <b>5,2</b>                        | 50 @ 250 MHz       | 820                           | 0.70                           | 400                       | Gray          |
| 0805CS-241X_L_           | 240 @ 100 MHz                   | <b>5,2</b>                        | 44 @ 250 MHz       | 770                           | 1.00                           | 350                       | Red           |
| 0805CS-271X_L_           | 270 @ 100 MHz                   | <b>5,2</b>                        | 48 @ 250 MHz       | 730                           | 1.00                           | 350                       | White         |
| 0805CS-331X_L_           | 330 @ 100 MHz                   | <b>5,2</b>                        | 48 @ 250 MHz       | 650                           | 1.40                           | 310                       | Black         |
| 0805CS-391X_L_           | 390 @ 100 MHz                   | <b>5,2</b>                        | 48 @ 250 MHz       | 600                           | 1.50                           | 290                       | Brown         |
| 0805CS-471X_L_           | 470 @ 50 MHz                    | <b>5,2</b>                        | 33 @ 100 MHz       | 375                           | 1.76                           | 250                       | Violet        |
| 0805CS-561X_L_           | 560 @ 25 MHz                    | <b>5,2</b>                        | 23 @ 50 MHz        | 330                           | 1.90                           | 230                       | Orange        |
| 0805CS-681X_L_           | 680 @ 25 MHz                    | <b>5,2</b>                        | 23 @ 50 MHz        | 310                           | 2.20                           | 190                       | Green         |
| 0805CS-821X_L_           | 820 @ 25 MHz                    | <b>5,2</b>                        | 23 @ 50 MHz        | 310                           | 2.35                           | 180                       | Blue          |

1. When ordering, specify **tolerance**, **termination** and **packaging** codes:

**0805CS-821XGLC**

**Tolerance:** F = 1% G = 2% J = 5%

(Table shows stock tolerances in bold.)

**Termination:** L = RoHS compliant silver-palladium-platinum-glass frit.  
Special order: T = RoHS tin-silver-copper (95.5/4/0.5)  
or S = non-RoHS tin-lead (63/37).

**Packaging:** C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

B = Less than full reel. In tape, but not machine ready.  
To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (7500 parts per full reel).

2. Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.

5. SRF measured using an Agilent/HP 8720D network analyzer and a Coilcraft SMD-D test fixture.

6. DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF858 test fixture.

7. Current that causes a 15°C temperature rise from 25°C ambient.

8. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com  
UK +44-1236-730595 sales@coilcraft-europe.com  
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw  
China +86-21-6218 8074 sales@coilcraft.com.cn  
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 100-1 Revised 01/11/12


© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.




# 0805CS Series (2012)


## Typical Q vs Frequency

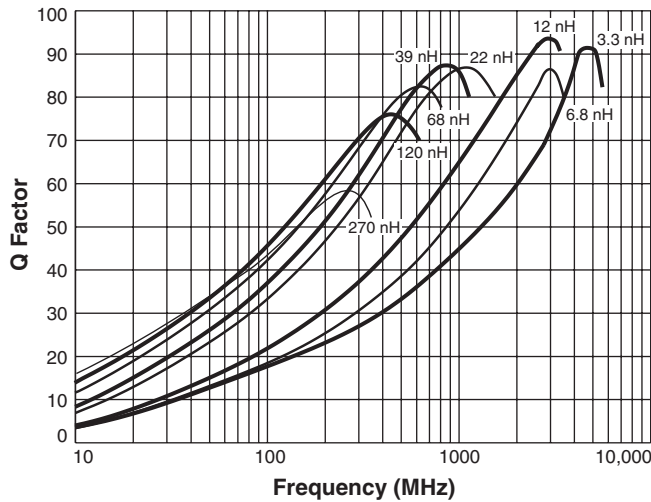

## Typical L vs Frequency

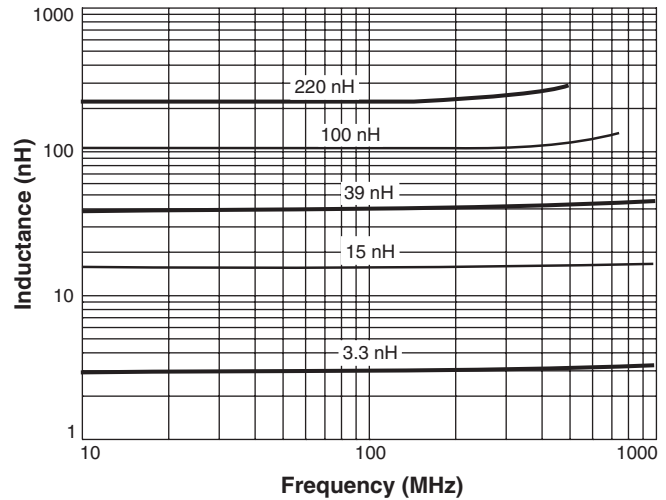

## Irms Derating

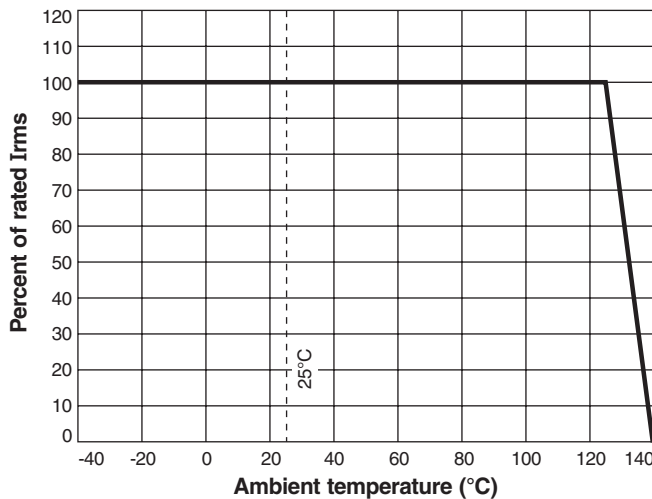

**Designer's Kit C303** contains 10 of each 5% part  
**Designer's Kit C303-2** contains 10 of each 2% part

**Core material** Ceramic

**Terminations** RoHS compliant silver-palladium-platinum-glass frit.  
 Other terminations available at additional cost.

**Weight** 10.2 – 11.6 mg

**Ambient temperature** –40°C to +125°C with Irms current, +125°C to +140°C with derated current

**Storage temperature** Component: –40°C to +140°C.  
 Packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +100 to +250 ppm/°C


**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

One per billion hours / one billion hours, calculated per Telcordia SR-332

**Packaging** 2000/7" reel; 7500/13" reel. Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.65 mm pocket depth

**PCB washing** Only pure water or alcohol recommended

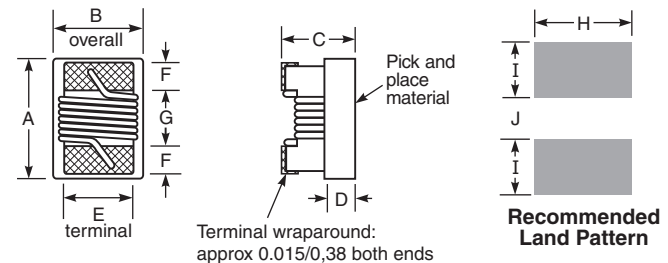

| A max | B max | C max | D ref | E     | F     | G     | H     | I     | J     |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0.090 | 0.068 | 0.060 | 0.020 | 0.050 | 0.020 | 0.040 | 0.070 | 0.040 | 0.030 |
| 2,29  | 1,73  | 1,52  | 0,51  | 1,27  | 0,51  | 1,02  | 1,78  | 1,02  | 0,76  |
|       |       |       |       |       |       |       |       |       | mm    |

**Note:** Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.

**COILCRAFT** ACCURATE  
 PRECISION REPEATABLE  
 MEASUREMENTS  
 SEE WEB SITE TEST FIXTURES



www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 100-2 Revised 01/11/12

© Coilcraft Inc. 2012

This product may not be used in medical of high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.