


Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

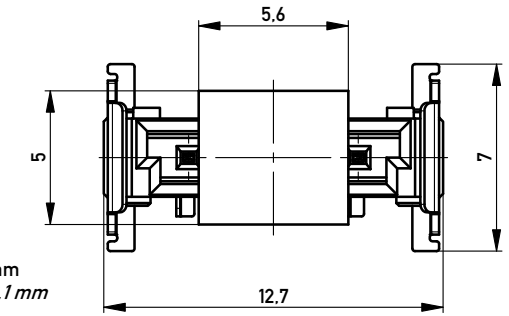


ohne Ansaughaube - *without hood*

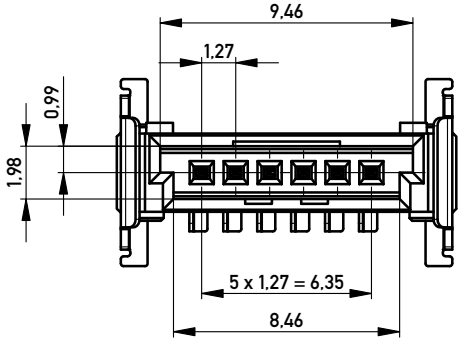

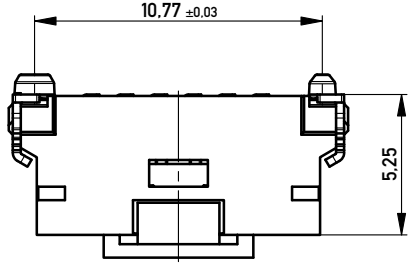


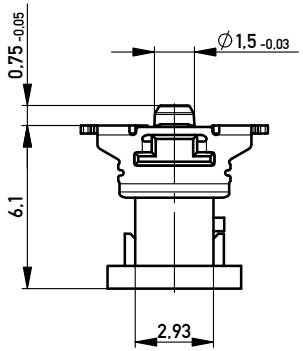


Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 650 Stück
Packaging unit: 650 pcs



Abspulrichtung - *Reel off Direction*

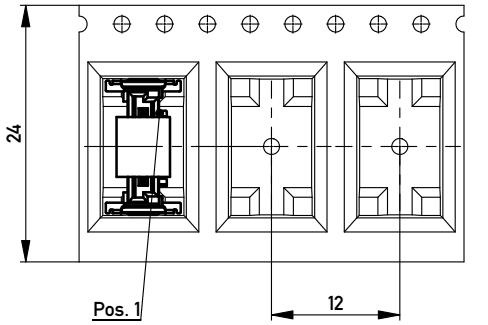

Leiterplatten-Layout für SMT
PCB-Layout for SMT

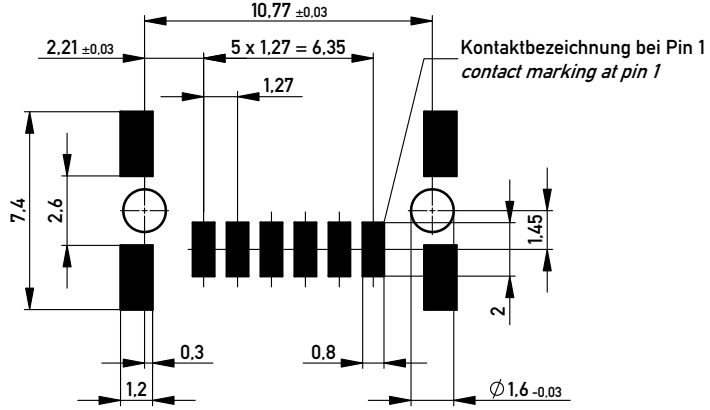

vergrösserte Lötpads - *enlarged solder pads*

Bauteilfarbe: weiß - *component color: white*

Information:

Tolerances

All Dimensions in mm

Scale 5:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

M 1,27 SRC P, 6-polig BA1

ERNI www.ERNI.com

284337

I

A3

d | 03.04.2013 | Index | Date

Class SRCP

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.