
Double-deck terminal block; Through/through terminal block; L/L; gray housing

Item No.: 870-501



Double-deck terminal block; Through/through terminal block; L/L; gray housing

Marking

RoHS ✓
Compliant

Business data

Supplier	*WAGO*
Item no.	*870-501*
GTIN / EAN	*4044918630863*
Content	*1*
Order amount	*50*
Customer item number	

Notes


Technical data


Miscellaneous


Safety information 1	*Max. insulation diameter: 4.4mm*
Packaging type	*BOX*
Ratings per	*IEC/EN 60947-7-1*
Rated voltage (III / 3) [V]	*500 [V]*
Rated impulse voltage (III / 3) [kV]	*6 [kV]*
Rated current [A]	*24 [A]*

Technical data	
Legend (ratings)	*(III / 3) Overvoltage category III / Pollution degree 3*
Type of wiring	*Front-entry wiring*
Total number of connection points	*4*
Total number of potentials	*2*
Number of levels	*2*
Connection technology	*CAGE CLAMP®*
Number of connection points (connection type)	*4*
Actuation type	*Operating tool*
Connectable conductor materials	*Copper*
Solid conductor	*0.08 … 2.5 mm² / 28 … 12 AWG*
Fine-stranded conductor	*0.08 … 4 mm² / 28 … 12 AWG*
Strip length	*6 … 7 mm / 0.24 … 0.28 Inch*
Width	*5 mm / 0.197 Inch*
Height from upper-edge of DIN-35 rail	*40 mm / 1.575 Inch*
Depth	*70 mm / 2.756 Inch*
Design	*horizontal*
Type of mounting	*Carrier rail 35 x 15*
Potential marking	*L/L*
Marking level	*Side marking*
Color	*gray*
Insulating material	*Polyamide 66 (PA 66)*
Fire load [MJ]	*0.168 [MJ]*
Weight [g]	*10.068 [g]*

Images & drawings

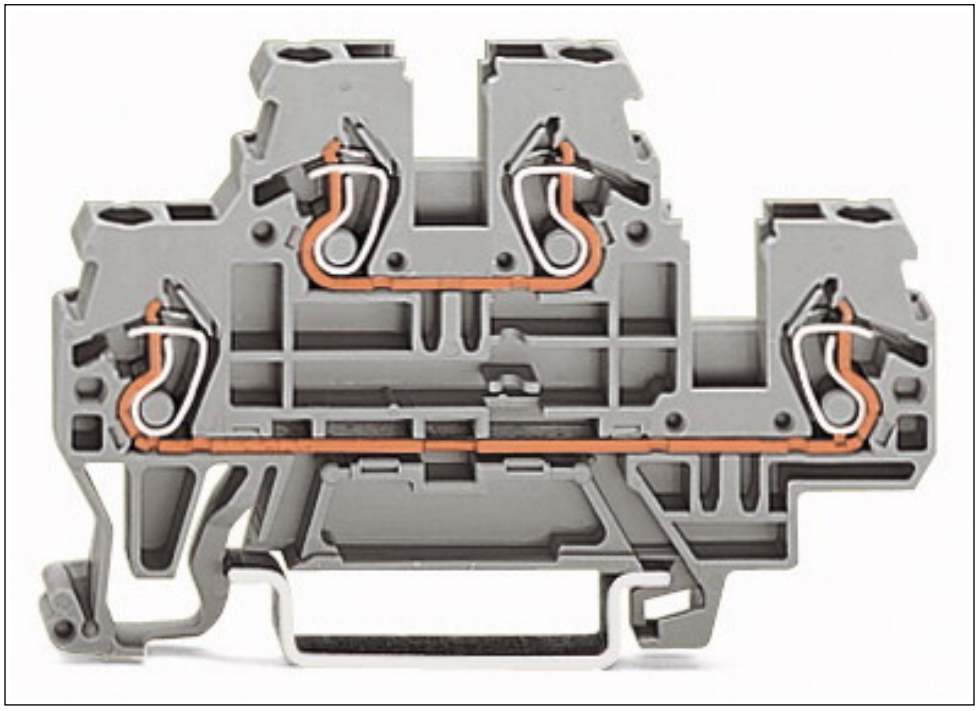

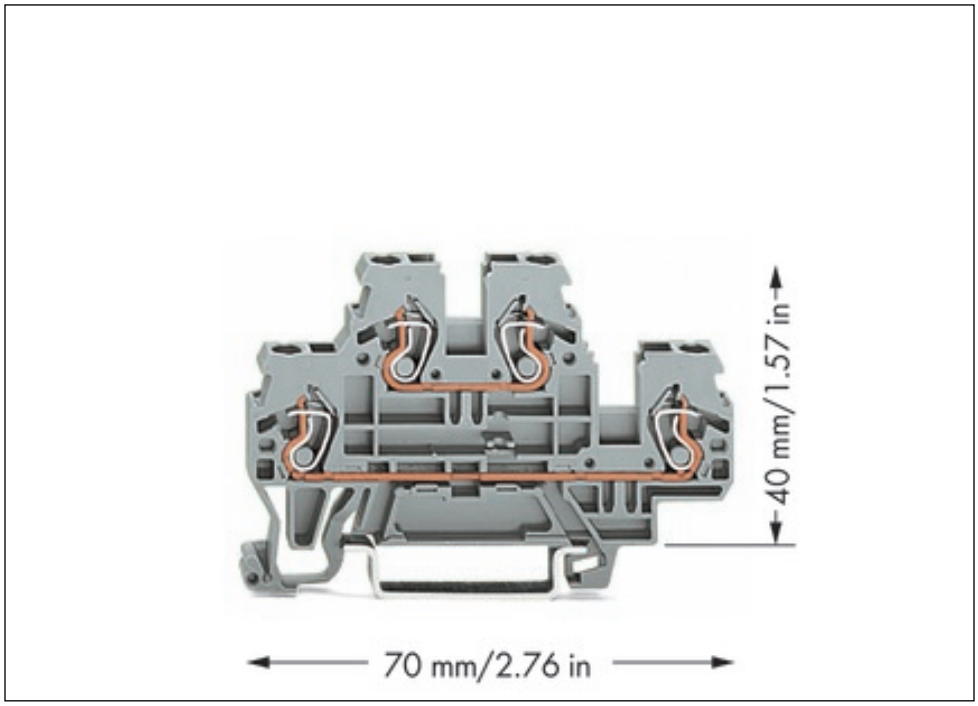

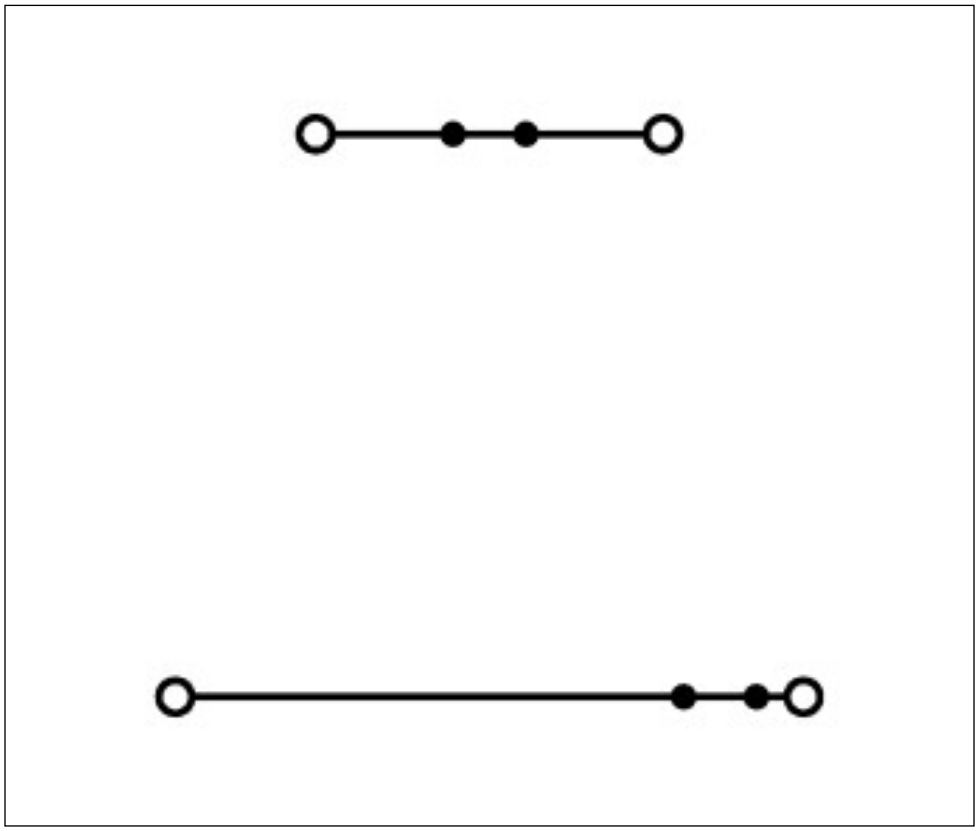

Address

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Telefon: 0571/887-0
Fax: 0571/887-169
http://www.wago.com
© WAGO Kontakttechnik GmbH & Co. KG
Technische Änderungen und Irrtümer vorbehalten.