

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

BAV70

Features

- Low Current Leakage
- Low Cost
- Small Outline Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking:A4/JA



Maximum Ratings


- Operating Temperature: -55°C to +150°C
 Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 357K/W Junction To Ambient


Electrical Characteristics @ 25°C Unless Otherwise Specified


Reverse Voltage	V_R	75V	
Average Rectified Output Current	<u>_0</u>	150mA	
Power Dissipation	P_{TOT}	350mW	
Peak Forward Surge Current	I _{FSM}	1.0A	t=1s,Non-Repetitive
Maximum Instantaneous Forward Voltage	V_{F}	855mV	I _{FM} = 10mA; T _J = 25°C*
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	2.5μA 50μA	V_R =75Volts T_J = 25°C T_J = 150°C
Typical Junction Capacitance	CJ	2 pF	Measured at 1.0MHz, V _R =0V
Reverse Recovery Time	T _{rr}	4nS	I_F =10mA V_R = 0V R_L =500 Ω

^{*}Pulse test: Pulse width 300 $\mu sec,$ Duty cycle 2%

350mW 75 Volt Dual Switching Diode









BINEROISE							
	INCHES		ММ				
DIM	MIN	MAX	MIN	MAX	NOTE		
Α	.110	.120	2.80	3.04			
В	.083	.098	2.10	2.64			
O	.047	.055	1.20	1.40			
D	.035	.041	.89	1.03			
Е	.070	.081	1.78	2.05			
F	.018	.024	.45	.60			
D	.0005	.0039	.013	.100			
Τ	.035	.044	.89	1.12			
J	.003	.007	.085	.180			
K	.015	.020	.37	.51			


DIMENSIONS

Suggested Solder Pad Layout





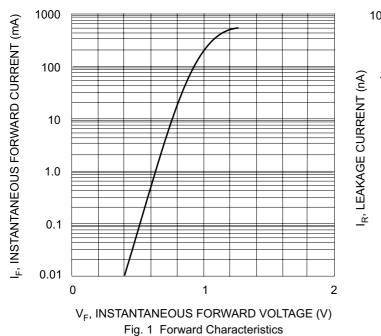

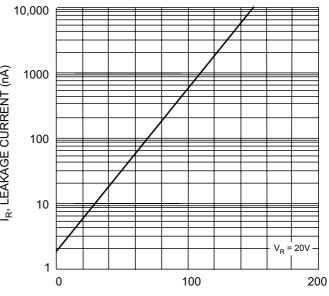

T_j, JUNCTION TEMPERATURE (°C) Fig. 2 Leakage Current vs Junction Temperature



IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.