




CATALOG LISTING
BZLN-LH5

CATALOG LISTING

Technical drawing of a pressure washer assembly showing a side view of the handle and trigger gun. The handle is 4.06 inches long and has a diameter of .48 inches. The trigger gun has a diameter of .50 inches and a length of .156 inches. The assembly includes a hardened steel plunger, a gasket, and a 1/2-14 NPSM thread (3 full threads minimum).

Dimensions and components labeled:

- 4.06 (Overall length of the handle)
- .156 MIN (Length of the trigger gun)
- .48 (Diameter of the handle)
- .19 (Distance from the handle end to the plunger)
- .50 (Diameter of the trigger gun)
- 1.0 (Overall height of the assembly)
- HARDENED STEEL PLUNGER
- GASKET
- 1/2-14 NPSM THREAD (3 FULL THREADS MIN)

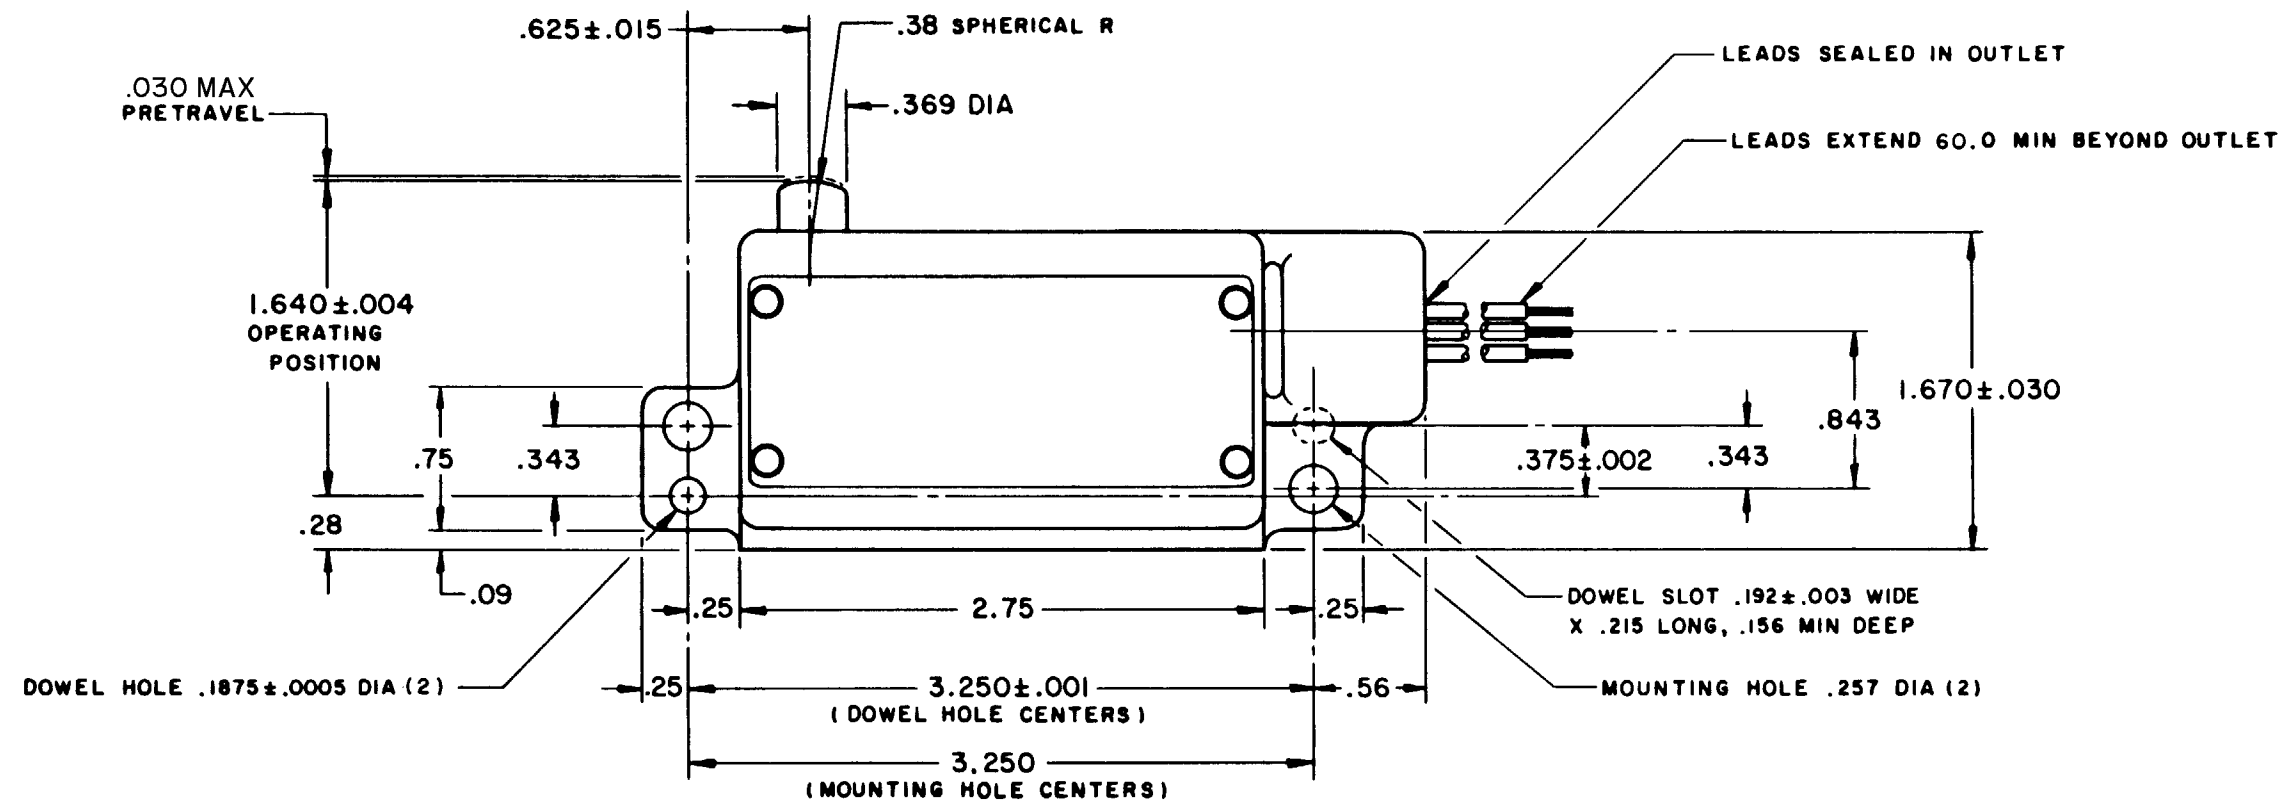

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — 5 LB MAX		CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — — 1 LB MIN		L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC 	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL — — .004 MAX			ONE PLACE (.0) ±.030
OVERTRAVEL — — — .203 MIN			TWO PLACE (.00) ±.010 THREE PLACE (.000) ±.001 ANGLES ±
			WEIGHT .720 LB PLUS LEADS

WIRING CONNECTIONS -
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD

WEIGHT	.720 LB PLUS LEADS
--------	-----------------------