



STRIP MATERIAL NUMBER	FINISH
84524-0004	OVERALL NICKEL 80µ" MINIMUM
84524-0014	SELECTIVE HARD GOLD 30µ" MINIMUM OVER NICKEL 50µ" MINIMUM

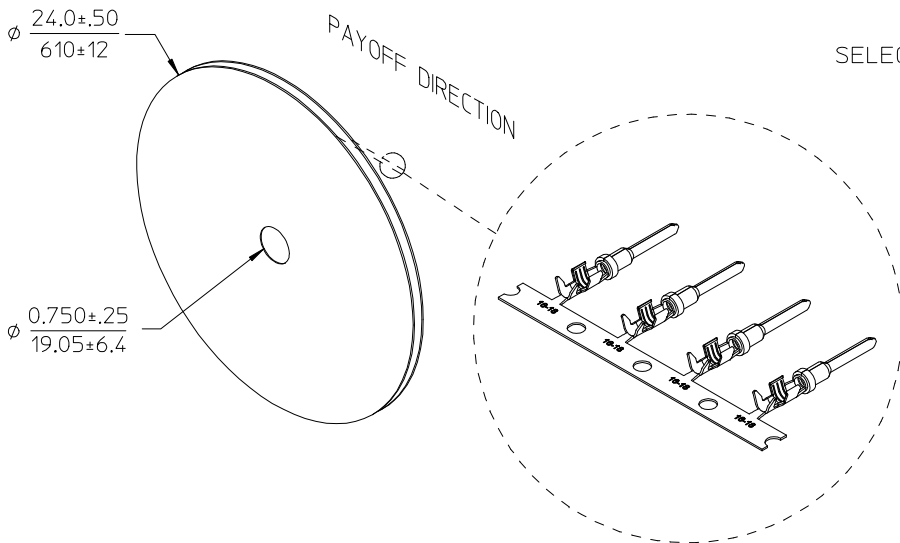

WIRE INSULATION O.D. RANGE .055-.085
1.40-2.16

- NOTES:
1. MATERIAL: COPPER ALLOY, .0118/0.300 THICK.
 2. FINISH: SEE CHART.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE ON XRC CONNECTOR ASSEMBLIES
 5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.
 6. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

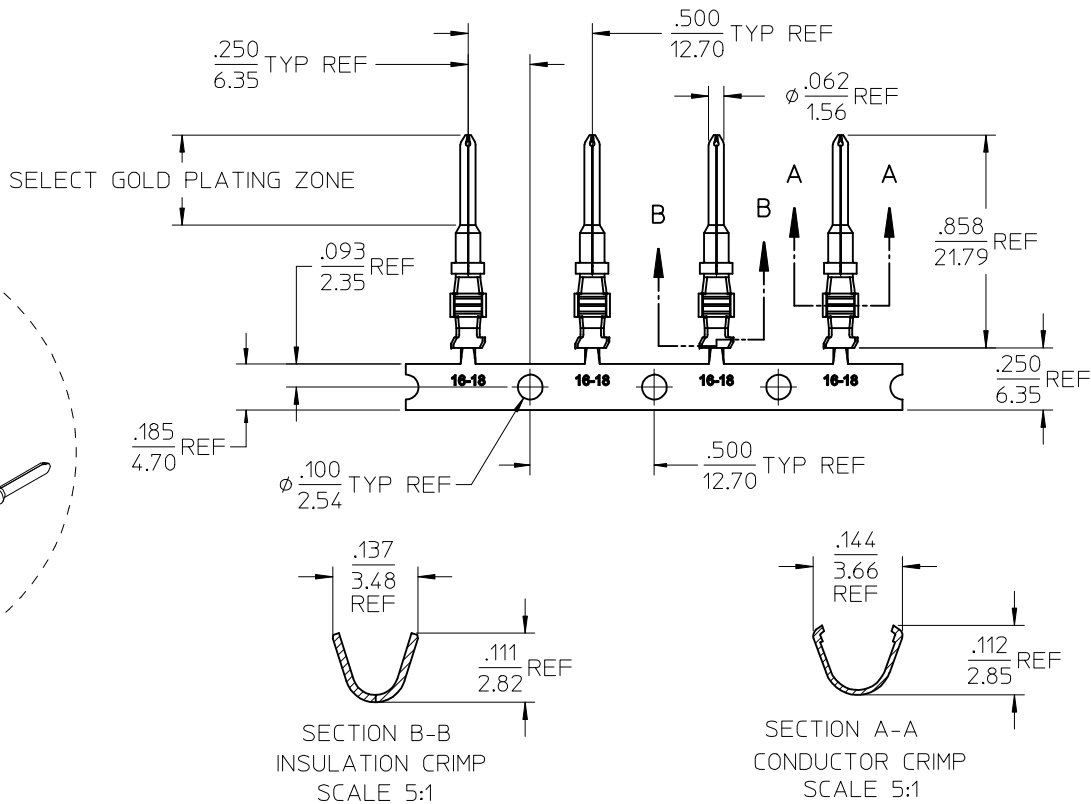

ADD NOTE 6 & UPDATE OD		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: IPG2013-1752		DRAWN BY: DRWINWLEUNG		mm		IN/MM		2:1		INCH		XRC PIN TERMINAL	
2013/06/06		2013/06/07		INCH		DATE		TITLE		16-18AWG		.055"-.085" DIA. WIRE	
CHKD:KJ02WIK		APPR:JFMURPHY		4 PLACES ±---		DRAWN BY: MODELL		2009/03/30		DATE		MATERIAL NO.	
2013/06/07		2013/06/20		3 PLACES ±---		CHECKED BY: RDEROSS		2009/03/30		DATE		DOCUMENT NO.	
DESCRIPTION		REV		2 PLACES ±0.13		APPROVED BY: DTITUS		2010/10/13		DATE		SD-84524-001	
1 PLACE ±---				1 PLACE ±---		MATERIAL NO.		DATE		SHEET NO.		1 OF 1	
ANGULAR ±---				ANGULAR ±---		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS													