



PARSCH
Schläuche • Armaturen
Hoses • Fittings

PARSCH MARITIME

uncoated Delivery Hose
for vessels

Quality made in Germany

Hose Construction

Jacket

100 % polyester high tenacity yarn, circular woven,
warp threads 2-ply twisted
max. change in length 3 %
max. change in diameter 3 %

Inner Lining

Two-component system consisting of black SBR-
synthetic rubber and white NBR-synthetic
adhesive.

Exterior

uncoated, natural white

FIRE FIGHTING HOSES



Internal diameter		Weight	Burst pressure	Working pressure* Safety ratio		Wall thickness
mm	inch	g/m	bar	2:1 bar	3:1 bar	mm
52	2	280	50	25	17	1,50

* Maximum recommended working pressure of the hose or maximum working pressure of the attached couplings whichever is the lower

Quality made by PARSCH





PARSCH
Schläuche • Armaturen
Hoses • Fittings

PARSCH MARITIME

uncoated Delivery Hose
for vessels

Quality made in Germany



Characteristics

good abrasion resistance and long service life
external resistance to oil, fuel and chemical products
low friction loss
lightweight and flexible — kink resistant
ageing and ozone resistant — weather resistant
cold resistant to - 30 °C, heat resistant up to + 80 °C

Applications

on shipboards


Couplings

system Storz or other international systems (e.g. BS, NEN, DSP or NST). We recommend brass, stainless steel or gun metal couplings.


Applicable Standards EN 14540, MED (wheelmark) module B

FIRE FIGHTING HOSES

MED certified

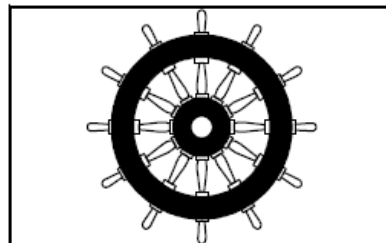

Two-component lining system

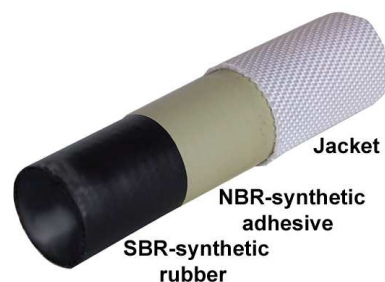

Tradition, Erfahrung und Qualität

Tradition, Experience and Quality

PARSCH GmbH & Co. KG
Schläuche • Armaturen
Gildestraße 16
49477 Ibbenbüren

☎ + 49 (0) 54 51 / 92 9 - 0

📠 + 49 (0) 54 51 / 92 92 92

✉ info@parsch.de

💻 www.parsch.de

Certified according to
DIN EN ISO 9001 : 2015
Quality Management System

Quality made by PARSCH



PARSCH GmbH & Co. KG Schläuche • Armaturen Tel.: +49 (0) 5451 / 92 9 - 0 www.parsch.de

Schläuche • Armaturen