

Product Brief

NLG Tether Tape™

101355



NLG Tether Tape™

Product code: 101355

PRODUCT BRIEF / 101355

Tether Tape™ uses advanced self-fusing silicone technology to create load rated tether points on any tool in seconds.

NLG Tether Tape™ uses advanced self-fusing silicone technology to create load rated tether points on any tool within seconds. As most tools are not designed with a manufactured attachment point, NLG's Instant Tether System™ uses Tether Tape™ and D Rings to quickly retrofit tether points, ready for any tool lanyard to connect to.

No heat source or other specialist tools are required to fit Tether Tape™ as it is simply activated by stretching. It fully bonds to itself within 24 hours at room temperature, but is tested and certified for immediate use. Because no adhesive is used in the process, the retrofitted tool tether can be easily removed when no longer required, leaving no sticky residue or permanent damage to the tool.

NLG Tether Tape™ features a fibreglass reinforcement mesh for exceptional strength, durability and resistance against tears and punctures.

Pair with a Large D Ring, Small D Ring or Non Conductive D Ring for common hand tools or use with Tether Choke™ single arm or twin arm when securing power tools and large straight shafted tools. Based on a general selection of hand tools, one roll will tether up to 10 tools on average.

Reduce wastage when the tether point is no longer needed by simply cutting away the Tether Tape™ and retaining the D Ring Tether or Choke™ so that it can be reused on another tool.

The flexibility and speed of the combined Instant Tether System™ make Tether Tape™ the first choice across a broad range of industries. Keep a roll to hand, and a selection of D Rings, and you'll never be caught out again.

INSTRUCTIONS

- 1/ Select the correct D Ring Tether for your tool.
- 2/ Cut a length of Tether Tape long enough to wrap around the tool at least 8 times. Remove the plastic backing.
- 3/ Check the tool is clean and locate the D Ring Tether, ensuring that the label is facing up. Wrap the Tether Tape around the D Ring Tether, leaving the webbing catch exposed.
- 4/ Ensure that the Tether Tape is firmly stretched during application. The self-fusing technology is activated when stretched between 5-10% and causes it to fuse permanently.
- 5/ Test the tether point before putting the tool into use.

INSPECTION

In addition to routine checks prior to each use, all equipment should undergo regular detailed inspection, conducted and recorded by a competent person using the NLG Inspection Checklist. If any part is worn or shows signs of degradation, immediately retire from service. In the event of a drop, quarantine the equipment for thorough inspection.

VIDEO GUIDE



Watch online:
neverletgo.com/tool-tether-guide

Specification

- Self-fusing stretch activation allows for quick and simple installation - no extra tools required
- Adhesive free design means no sticky residue left on the tool when removed
- Fibreglass reinforcement mesh, for high strength and durability
- Adds comfortable ergonomic grip to tool handles
- Inherently flame retardant and when burned forms a non-conductive ash
- Effective temperature range: - 50°C to 250°C
- ANSI/ISEA 121-2018 compliant
- Dynamic load tested and third-party certified (2:1 safety factor)
- Dimensions: 25mm x 2.8M
- Max Load: 5KG (11lbs)

Orange Tether Tape™

Product code: 101479

An alternative colour to the original green Tether Tape™ which allows for the simple visual management of replacement periods.

PRODUCT DATA

Weight: 57 Grams
EAN (GTIN-13): 5060572180550
HTS Code: 3921.90.9000



MAX LOAD (SWL)

5KG / 11LBS

SERIAL NUMBERED

Makes the management of inspection routines and reports easy and traceable

PRODUCT DATA


Weight: 57 Grams
EAN (GTIN-13): 5060572180031
HTS Code: 3921.90.9000



Third party
tested and
certified

See the
Test Certificate
on page 5



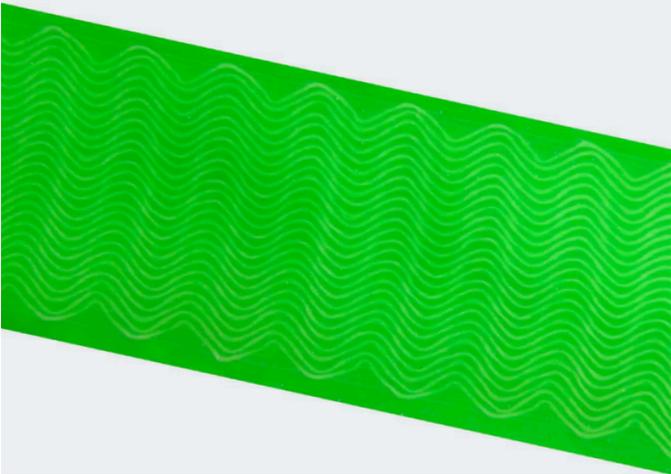



Breathe Safety Testing Laboratory

UKAS Testing No 8856 | Accredited to ISO/IEC17025/2005

DROP TEST CERTIFICATE

42814DT-NLG-103355

PRODUCT IDENTIFICATION

Manufacturer:
NLG

Max Load (WLL):
5 KG

Product:
Tether Tape

Safety Factor:
2 : 1

Reference:
101355

Test Load:
10 KG

TEST TECHNICIAN

Signature:

Name:
Gary Paterson

Date:
20-03-17

Position:
Senior Lab Technician

TEST RESULTS

SAMPLE NUMBER	FACTOR 0	FACTOR 1 DROP 1	FACTOR 1 DROP 2	FACTOR 1 DROP 3	FACTOR 2 DROP 1	FACTOR 2 DROP 2	FACTOR 2 DROP 3
1	PASS	PASS	PASS	PASS	PASS	PASS	PASS
2	PASS	PASS	PASS	PASS	PASS	PASS	PASS
3	PASS	PASS	PASS	PASS	PASS	PASS	PASS

United Kingdom Accreditation Service

ACCREDITATION CERTIFICATE



TESTING LABORATORY
No. 8856
Breathe Safety Limited

Please note that the results included in this report relate only to the specific equipment samples tested. This is for the purpose of Type Approval of Equipment under the PPE Directive. For more detail refer to the full Accredited Laboratory Policy. This report may not be reproduced without authorisation from the laboratory. Any deviations from specific test methods are described in the relevant section of the report.

- Fully Equipped Laboratory for CE Type Approval Testing
- Product Trial testing for specific tests
- CE Technical File review and consultancy advice
- CE Certification facilitation through a partner Notified Body

0844 915 1111

17 Whittle Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7RL

EU Declaration of Conformity

REFERENCE NUMBER: **364101355103**

01 / Manufacturer

NAME: NLG
 ADDRESS: 6 Mannings Heath Road
 Poole, Dorset, BH12 4NQ
 United Kingdom

02 / Product

CODE: 101355
 DESCRIPTION: Tether Tape
 LOAD RATING: 5 KG / 11 LBS

03 / Conformity

The undersigned acting on behalf of [01] above hereby declares that:

The PPE described in [02] is in conformity with the provision and scope of our quality control and testing protocols set out in the PPE Regulation (EU) 2016/425 covering all PPE manufacturing, where such is the case, with the standard of fit for purpose design parameters. The above referred to Personal Protective Equipment [02] is identical to the equipment independently tested and certified by BSTL in accordance with EN 364:1992 test methods.

Dynamic drop performance testing conducted at 2:1 weight safety factor for tool lanyards and tether points. Static strength testing conducted at 5:1 weight safety factor for containers and storage equipment.

CERTIFICATE NUMBER: 42814DT-NLG-103355
 ISSUED BY: BSTL, Whittle Road
 Ferndown Ind. Estate, BH217RL, UK

04 / Authorised Person

I herewith certify that the equipment identified above in [02] conforms to the requirements as detailed above:

SIGNED: 
 NAME: Julian Aris
 POSITION: Managing Director
 DATE: 25 / 04 / 18

Tool Tethering Experts
neverletgo.com



Declaration of Conformity

ANSI/ISEA 121-2018

REFERENCE NUMBER: **121101355103**

American National Standard for
Dropped Objects Prevention Solutions

01 / Manufacturer

NAME: NLG
 ADDRESS: 6 Mannings Heath Road
 Poole, Dorset, BH12 4NQ
 United Kingdom

02 / Product

CODE: 101355
 DESCRIPTION: Tether Tape
 LOAD RATING: 5 KG / 11 LBS

03 / Conformity

The undersigned acting on behalf of [01] above hereby declares that the product described in [02] meets all applicable requirements as stated in ANSI/ISEA 121-2018.

ANSI/ISEA 125-2014 CONFORMITY ASSESSMENT METHOD: Level 1

TEST FACILITY: (Independent third party)
 BSTL, Whittle Road
 Ferndown Ind. Estate, BH21 7RL, UK
 CERTIFICATE NUMBER: 43332DTA-NLG-103466
 DATE: 20-08-18

04 / Authorised Person

I herewith certify that the equipment identified above in [02] conforms to the requirements as detailed above:

SIGNED: 
 NAME: Julian Aris
 POSITION: Managing Director
 DATE: 13 / 09 / 18

Tool Tethering Experts
neverletgo.com





NLG Tether Tape

Product code: 101355

View online

neverletgo.com/tether-tape/

Get all the Product Briefs

neverletgo.com

Tool Tethering Experts

neverletgo.com

NLG makes every effort to ensure the information in this Product Brief is accurate and current. However, NLG reserves the right to change the product specification when or if deemed necessary. NLG cannot be held responsible for any inaccuracies or omissions. Copyright © 2018. NLG ® and Never Let Go ® are registered trademarks.