

Absocold® ENERGY STAR® Qualified
Hospitality Refrigerator
2.0 cu. ft. Single-Door - Auto-Defrost



SUITE FRIDGE® ARD204A

 **Stainless Door/Black Cabinet**
Model: ARD204ABS21R/L

 **Black**
Model: ARD204AB21R/L



Suite Fridge® hospitality refrigerators are specifically designed for commercial hotel applications only and are *not intended for medical or consumer residential applications.*

KEY BENEFITS

- Fits most existing absorption-type unit cabinetry
- More energy and cooling efficient than absorption refrigerators
- Maintains 38°F at 75.2°F ±1.8°F ambient temperature
- Special QUICK CHILL 'N SNOOZE® Functions
- Environmentally safe - R600a refrigerant & HFO foaming
- Quiet Operation

FEATURES

| | |
|------------------------|---|
| Energy | ENERGY STAR® Qualified - Tier I 249 KWH/Yr Energy Consumption 10% less energy than Federal Standard |
| QUICK CHILL 'N SNOOZE® | Snooze Function (8 hours) Quick Chill Function (2 hours) |
| Defrost Type | Automatic Defrost |
| Door Type | Easy-Clean Euro-Round Door |
| Door Handle | Integrated Handle |
| Door-Swing | Reversible (Factory Standard, Right-Hand Hinge) |
| Interior Shelves | 2 Full-Width Removable Shelves |
| Door Storage | Beverage Can Dispenser (5 cans) 2 Door Shelves |
| Cabinet Design | Fits Most Existing Absorption Unit Cabinetry Clean-Back Design |
| Leveling | 2 Front Adjustable Leveling Feet |
| Capacity | 2.0 cu. ft. Total Capacity |

INSTALLATION REQUIREMENTS

Remove all packing material and tape. Install on a level floor or well-supported counter. Avoid any direct sunlight, heat source, or moisture. This product is designed to be *freestanding* and must be installed at least 2" from the wall, 3/4" to 1" above the floor or carpet, 1" on sides, and 2" on top in order to let the air circulate freely around the unit.

Product specifications subject to change without notice


DIMENSIONS

| | |
|-----------------|-------------|
| Height | 22 3/8 in. |
| Width | 18 1/2 in. |
| Depth | 19 in. |
| Weight | 40 lbs. |
| Carton Height | 23 1/2 in. |
| Carton Width | 21 in. |
| Carton Depth | 20 in. |
| Shipping Weight | 44 lbs. |
| Shipping Cube | 5.7 cu. ft. |

ELECTRICAL

A minimum 15 AMP electrical supply is required (20 AMP electrical supply preferred). A time-delay fuse or circuit breaker and separate circuit is recommended. 115V., 60 Hz.

Running Amperage: 0.9 AMPS

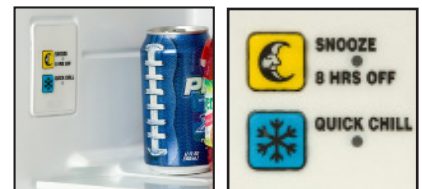

ARD204ABS



ARD204AB



Commerical UL® listing (File# SA11117)

Patent, Copyright and Trademark Information
This product is covered by US Patent #7,634,918.
Other US Patents Pending.

Absocold, P.O. Box 1545, Richmond, IN 47375
Toll-Free: 800-843-3714 • Fax: 765-935-3450
www.absocold.com • absocold@absocold.com