

SF640(P) SF640-AB/AW



Display size
32"-60"



Max load
150lb (68kg)

Additional Features

- ✓ Universal mount fits displays with mounting patterns up to 450 x 405mm (17.73" W x 15.95" H)
- ✓ Open wall plate design allows for total wall access, increasing electrical and cable management options
- ✓ Low-profile design holds display only 1.25" (32mm) from the wall for a low-profile application
- ✓ Horizontal display adjustment of up to 6" (152mm) (depending on display model) for perfect display placement
- ✓ Universal display adaptors easily hook onto wall plate for fast installation
- ✓ Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- ✓ Comes with fastener pack with all necessary display attachment hardware
- ✓ Integrated security options available
- ✓ Agion® antimicrobial* finish assists in controlling the spread of infections with SF640-AB/AW models
- ✓ Landscape to portrait mounting options increases installation versatility. Please check your display dimensions against the wall plate when used in portrait mode**.

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use. Visit agion-tech.com for more details.

**Requires display to be removed and reset on mount



SF640-AB/AW:



Patented. Utility Patent No. 7,823,850; 8,517,322.


SMARTMOUNT.

Universal Flat Wall Mount

FOR 32" TO 60" DISPLAYS

The SF640 series delivers limitless placement opportunities with speed and ease. SF640's ultra-slim open wall plate architecture delivers display placement flexibility and enables easy electrical access and cable management. This ultra-slim mount is the ultimate solution for low-profile applications.

The SF640's low-profile design holds displays just 1.25" from the wall, perfect for almost any low-profile application.

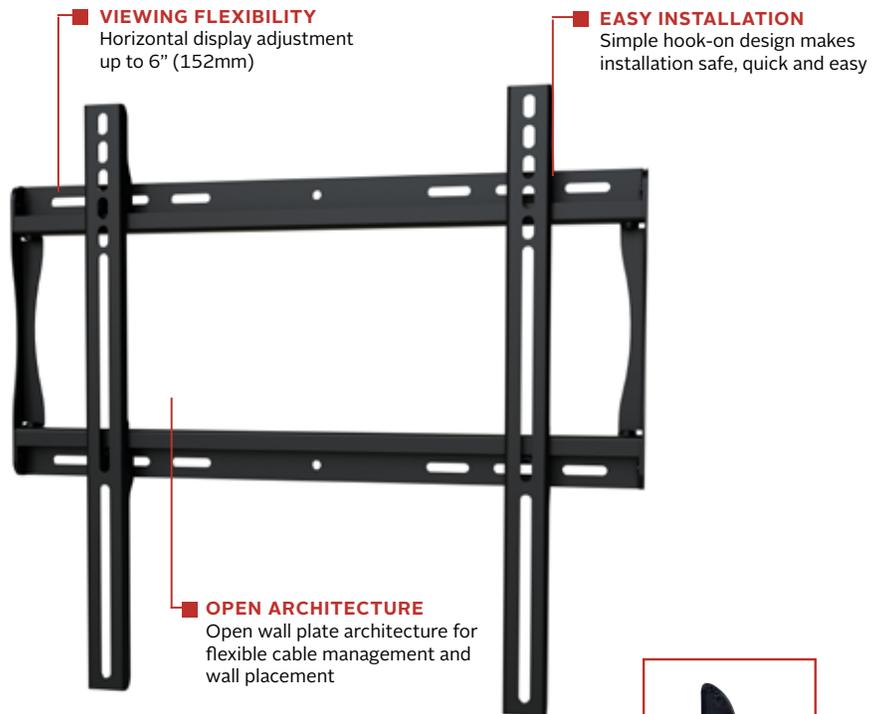

Low-profile design holds display only 1.25" (32mm) from the wall

SF640P	SmartMount® Universal Flat Wall Mount for 32" to 60" Displays - standard models
SF640(-AB/AW)	SmartMount® Universal Flat Wall Mount for 32" to 60" Displays - security models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SF640(-AB/AW)(P)	19.37" x 16.89" x 1.25" (492 x 429 x 32mm)	3.82lb (1.73kg)	150lb (68kg)	Matte	SF640(P): Black SF640-AB: Antimicrobial* black SF640-AW: Antimicrobial* white

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use. Visit agion-tech.com for more details.


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SF640(-AB/AW)(P)	20.37" x 10.06" x 3.5" (518 x 256 x 89mm)	5.7lb (2.58kg)	SF640: 735029235651 SF640P: 735029235675 SF640-AB: 735029283607 SF640-AW: 735029283690	Wall plate, universal brackets, mounting and display attachment hardware	1


Accessories

- ACC415:** 4-pack Metal Stud Fastener Kit
- ACC309:** Video Conference Shelf


All dimensions = inch (mm)

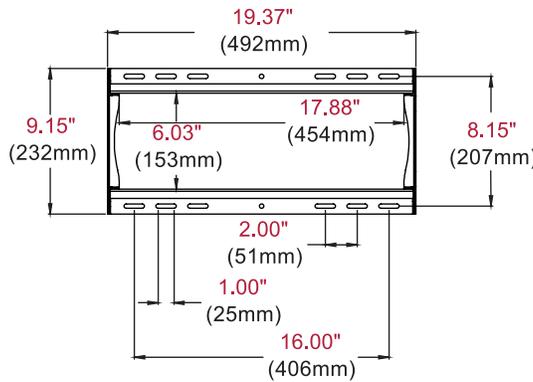


WALL PLATE

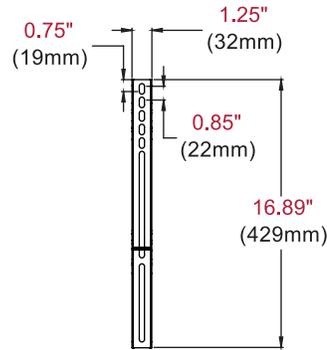

VERTICAL ADAPTOR

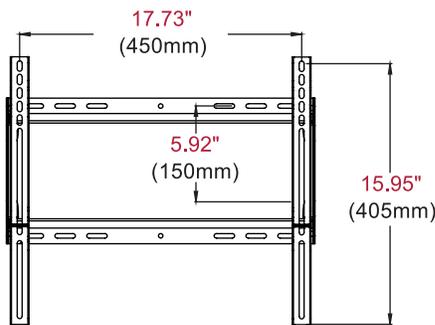

FRONT VIEW



SIDE VIEW

Architect Specifications

The Smartmount® Universal Flat Wall Mount shall be a Peerless-AV model SF640(-AB/AW)(P) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

