

CROSSOVER 2.0

Coin/Card
Washer

In a class by itself.

Strength, durability, and performance are at the center of the newly refined Crossover 2.0 by Wascomat small chassis front load washer. Built with professional grade components and loaded with powerful features, Crossover combines innovative technology, energy efficiency, and proven Wascomat reliability for optimal results every time.

Crossover 2.0 Key Features

- Extra large load drum — 22+ pound capacity
- 15,000+ cycle machine life design (tested at full load)
- Real-time clock for happy hour, promotional pricing
- Superb cleanability with 4 field adjustable wash programs
- Top quality SKF bearings in a heavy duty cast iron housing
- 3 seals with 5 lips protect bearings
- Pump drain standard
- ADA compliant
- 300 G-force for greatest spin moisture reduction and faster dry time
- Superior over-suds and unbalance tolerance
- AC motor (no brushes)
- Front access for easy serviceability
- Professional 8-point suspension
- Solid steel counterweights — no concrete
- Quiet operation
- Saves up to 60% on water vs. top load washers
- 2 cycle upgrade buttons enhance revenue
- Soft mount design for easy installation
- ENERGY STAR® Certified



Model No. – Metered (Coin) – WHLFP817M
Model No. – Card Ready – WHLFP817DC


15,000+ Cycles*

We don't just make promises, we deliver results — year after year, cycle after cycle. Crossover 2.0 semi-professional washers are built with commercial components and last nearly three times longer than residential models & top load washers.

*Note: that's tested at full load capacity!

Crossover 2.0 Washer Specifications at a Glance

| | |
|-----------------------------|-----------------------|
| Wash Capacity | 22 lb / 10 kg |
| Cylinder Volume | 3.5 cu ft / 98 liters |
| A. Overall Height | 43 1/4 in (1098 mm) |
| B. Height to Center of Door | 23 in (584 mm) |
| C. Height to Bottom of Door | 12 3/16 in (310 mm) |
| D. Overall Width | 27 in (686 mm) |
| E. Overall Depth | 30 1/8 in (765 mm) |
| F. Depth w/ Door Open 90° | 51 3/16 in (1300 mm) |

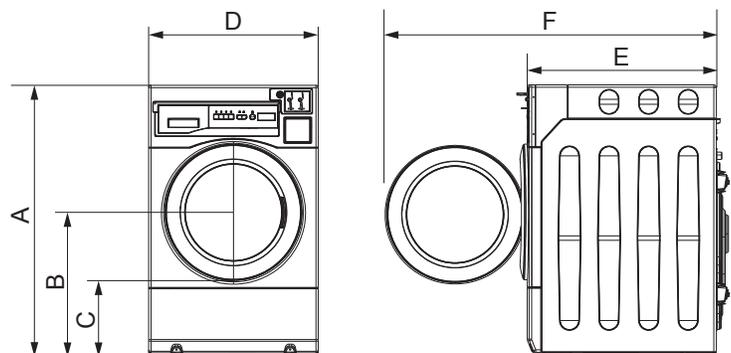

Preliminary specifications. Specifications subject to change without notice.

Crossover 2.0 Washer Specifications

| | |
|----------------------|--|
| Model No. | Metered (Coin) / Card-ready – Pump Model WHLFP817M / WHLFP817DC |
| Motor | Variable-speed, reversible, thermo-protected, high-efficiency, controlled induction |
| Electrical Rating | 120 V/60 Hz/1-phase |
| Breaker Requirements | 15A |
| Cylinder Volume | 3.5 cu ft (98 liters) |
| Cylinder Diameter | 21 5/8 in (550 mm) |
| Cylinder Depth | 18 1/4 in (464 mm) |
| Wash Capacity | 22 lbs (10 kg) |
| Door Opening | 15 in (380 mm) |
| Wash Speed | 45 RPM |
| Maximum RPM* | 1,050 RPM |
| Maximum G-force* | 300 G |
| Inlet Hose | 2 3/8 in (hoses included) |
| Water Pressure | 15-90 psi (100-600 kPa) |
| Drain Hose | 1 in (25.4 mm) |
| Crated Weight | 314 lbs (142 kg) |
| Uncrated Weight | 299 lbs (136 kg) |

Crossover 2.0 Washer Dimensions

| | |
|-----------------------------|----------------------|
| A. Overall Height | 43 1/4 in (1098 mm) |
| B. Height to Center of Door | 23 in (584 mm) |
| C. Height to Bottom of Door | 12 3/16 in (310 mm) |
| D. Overall Width | 27 in (686 mm) |
| E. Overall Depth | 30 1/8 in (765 mm) |
| E. Depth w/ Door Open 90° | 51 3/16 in (1300 mm) |

* **NOTE:** the correct measurement of extraction efficiency is G-force, not RPM. A higher RPM does not mean greater extraction, which depends on cylinder diameter.

Refer installation and servicing to qualified, licensed personnel. Always read Installation and Operating Manuals and consult local codes before installation. Protect machines with properly rated circuit breakers **ONLY**. Warranty void if not properly installed.

Preliminary specifications.


Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

Money boxes and coin meter sold separately.



8-Point Suspension

The robust 8-point suspension features advanced technology to keep loads in balance, eliminate oversuds, and finish the cycle. Premium counterweights are constructed of solid steel providing additional strength and enhancing the longevity of the machine.

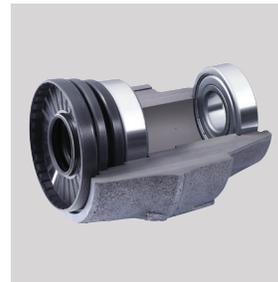

Heavy Duty SKF Bearings


Two commercial grade SKF bearings are sealed for maximum protection. Three individual seals with 5 lips provide a water-tight barrier around the drive shaft to protect the bearings from damaging moisture.



Time-of-Day Promo Pricing

Crossover 2.0 washers are easily programmable with promotional vend pricing at specified times and days. Multiple promotion events can be programmed at one time using the built-in real time clock.

Crossover 2.0 Washer Product Dimensions

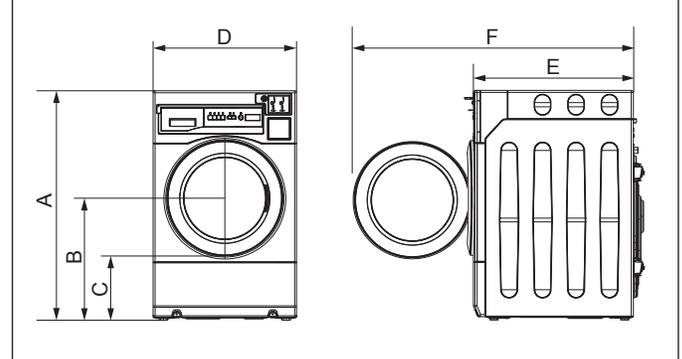

DISTRIBUTED BY:

ALMO[®]

Distribution on a *Personal Level*

To learn more, call (800)345-2566

www.almo.com