### DWHD770CFM STAR SAPPHIRE® 7-PROGRAM DISHWASHER MASTERPIECE® SERIES HANDLE







Also Available In:

DWHD770CFP – Flat Stainless Steel Panel with Professional Series Handle

DWHD770CPR – Custom Panel

### **FEATURES & BENEFITS**

- ★ StarDry<sup>™</sup> No one dries better. Star Dry with Zeolite: the ultra-powerful program that dries dishes better so place settings, glassware, and even sturdy plastics and containers with hard-to-reach crevices are ready for use immediately after each cycle
- ★ Multi-Color Star Glow light illuminates your dishwasher with any color you choose via the Home Connect app.
- ★ Entertainer's Drawer (3rd Rack) provides the ultimate flexibility in cleaning your culinary kitchen tools
  - Time Remaining  $\mathsf{PowerBeam}^{\textcircled{\sc 0}}$  shines the actual remaining time of the cycle on the floor
  - Smooth-glide ball bearing wheels on lower, upper, and third  $\operatorname{rack}$
  - 18 Wine Glass Capacity No need to clean your glassware in two cycles; wash them all at once so you can get back to your guests
  - Thermador connected experience by Home Connect enables exclusive dishwasher features and appliance interaction through app, voice, smartwatch and more

| GENERAL PROPERTIES   |  |
|--|--|
| Number Of Wash Cycles  | 7  |
| Number Of Options  | 7  |
| NSF®-Certified* Sanitize Option  | Yes  |
| dBA  | 42 dBA   |
| Third Rack   | Entertainer's Drawer   |
| Rack Adjustability   | Rackmatic 3-Stage  |
| Tub Material   | Stainless Steel  |
| Control Type   | Premium Touch Control  |
| Concealed Water Heating Element  | Yes  |
| Leak Protection System   | 24/7 AquaStop®   |
| Water Softener   | Yes  |
| Five-Level Wash  | Yes  |
| Childlock  | No   |
| Home Connect (Wi-Fi Enabled)   | Yes  |
| EFFICIENCY   |  |
| Water Usage Per Cycle  | 3.5 g  |
| Energy Efficiency Class  | Tier 1   |
| ENERGY STAR <sup>®</sup> Certified   | No   |
| Total Annual Energy Consumption  | 269 kWh  |
|  |  |
| Total Annual Water Consumption   | 623.5 g  |
| Total Annual Water Consumption CAPACITY  | 623.5 g  |
| ·  | 623.5 g<br>16  |
| CAPACITY   |  |
| CAPACITY<br>Number Of Place Settings   |  |
| CAPACITY<br>Number Of Place Settings<br>TECHNICAL DETAILS  | 16   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts  | 16<br>1440 W   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current  | 16<br>1440 W<br>12 A   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts  | 16<br>1440 W<br>12 A<br>120 V  |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency  | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit  | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67 "<br>Left - 45"   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door   | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67"<br>Left - 45"<br>Right - 56"   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure  | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67 "<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)   |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake  | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67"<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)<br>140° F  |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake Length Inlet Hose  | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67 "<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)<br>140° F<br>N/A<br>79 "  |
| CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts Current Volts Frequency Power Cord Length Power Cord Install Length from Corner of Unit when Facing the Door Minimum Water Pressure Max. Temperature for Water Intake Length Inlet Hose Length Outlet Hose   | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67 "<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)<br>140° F<br>N/A  |
| CAPACITY<br>Number Of Place Settings<br>TECHNICAL DETAILS<br>Watts<br>Current<br>Volts<br>Frequency<br>Power Cord Length<br>Power Cord Install Length from Corner of Unit<br>when Facing the Door<br>Minimum Water Pressure<br>Max. Temperature for Water Intake<br>Length Inlet Hose<br>Length Outlet Hose<br>DIMENSIONS & WEIGHT   | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67"<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)<br>140° F<br>N/A<br>79"<br>33 <b>7/8</b> " x 23 <b>9/16</b> " x                                      |
| CAPACITYNumber Of Place SettingsTECHNICAL DETAILSWattsCurrentVoltsFrequencyPower Cord LengthPower Cord Install Length from Corner of Unit<br>when Facing the DoorMinimum Water PressureMax. Temperature for Water IntakeLength Inlet HoseLength Outlet HoseDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)   | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67"<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)<br>140° F<br>N/A<br>79"<br>33 7/8" × 23 9/16" ×<br>23 3/4"<br>33 7/8" Min. x 23 5/8"                 |
| CAPACITY<br>Number Of Place Settings<br>TECHNICAL DETAILS<br>Watts<br>Current<br>Volts<br>Frequency<br>Power Cord Length<br>Power Cord Length from Corner of Unit<br>when Facing the Door<br>Minimum Water Pressure<br>Max. Temperature for Water Intake<br>Length Inlet Hose<br>Length Outlet Hose<br>DIMENSIONS & WEIGHT<br>Overall Appliance Dimensions (HxWxD)<br>Required Cutout Size (HxWxD) | 16<br>1440 W<br>12 A<br>120 V<br>60 Hz<br>67 "<br>Left - 45"<br>Right - 56"<br>14 (lb/sin)<br>140° F<br>N/A<br>79 "<br>33 7/8" x 23 9/16" x<br>23 3/4"<br>33 7/8" Min. x 23 5/8"<br>Min. x 24" |

\*Certification to NSF/ANSI Standard 184 for residential dishwashers

# DWHD770CFM STAR SAPPHIRE® 7-PROGRAM DISHWASHER

Thermador

| MASTERPIECE® SERIES HAND | L |
|--------------------------|---|
|--------------------------|---|

| WARRANTY  |                 |
|---|-----------------|
| Limited Warranty, Entire Appliance, Parts and Labor                       | 2 Year          |
| Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only  | 3rd to 5th Year |
| Limited Warranty for Racks (Does Not Include Rack Components); Parts Only | 3rd to 5th Year |
| Limited Warranty for Rust-through On Inner Tub Liner; Parts Only          | Lifetime        |

#### ACCESSORIES (OPTIONAL)

Use & Care manual, or ask your dealer.


| Dishwasher Installation Kit (Junction Box,<br>90° Elbow and Water Supply Hose) | SMZ3IN1UC  |
|--|------------|
| Dishwasher Supply and Drainage Hose<br>Extension 76 <b>3/4</b> "               | SGZ1010UC  |
| Junction Box   | SMZPCJB1UC |
| Cabinet Protector with Power Cord Clip   | SMZEPCC1UC |
| Water supply hose  | SMZSH002UC |
| Dishwasher Accessory Kit**   | SMZ5000    |
| Fine Silverware Carafe   | SMZ5002UC  |



\*\*Accessory Kit includes Extra-Tall-Item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket



Fine Silverware Carafe

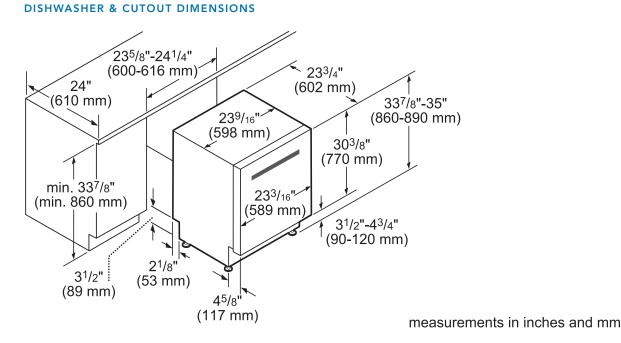

## These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2022 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.