




TECHNICAL DATA SHEET

HW22001 Fluted Oak

Vertical

USAGE: (SEE HAVWOODS QUICK REFERENCE GUIDE TO CHOOSING THE CORRECT FLOOR).

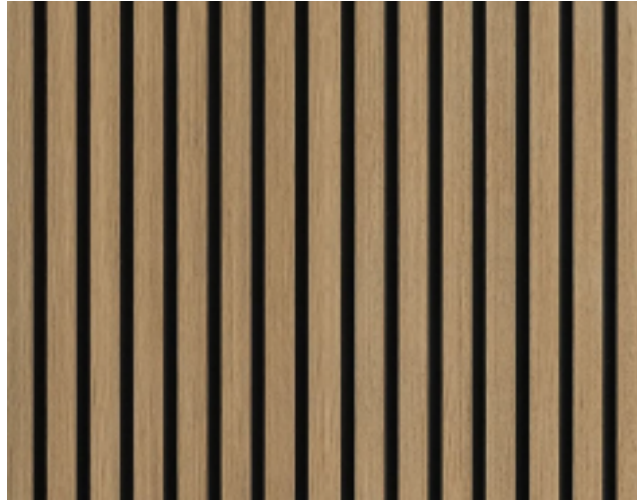

PRODUCT DETAILS

Product Code	HW22001
Product Range	Vertical
Construction	Engineered
Specie	European Oak
Pattern	Fluted Panel
Process	Sanded
Finish	Lacquered
Profile	PAR
Edge Profile	Square Edge
Top Layer	0.6 mm European Oak
Backing	Beech Veneer
Thickness	13mm
Width	600mm
Length	2400mm
Pack Size	2.88m ²
Maintenance	Comprehensive maintenance instructions and materials are available from Havwoods for all floors.

INSTALLATION METHODS

Fully Bonded	Yes* (recommended)
Nailed	No

TECHNICAL CRITERIA

Origin	Europe
Responsible Certification	Please ask a member of staff for details
Formaldehyde Emission	E1 (EN 717-1)
Pentachlorophenol Emission	NPD
Reaction to Fire Certification	Class D (EN13501-1)
Thermal Conductivity	NPD



* Subject to compatible subfloor and correct installation (see Installation Guidelines) including sensors.

** This product may require on-site sanding prior to applying a suitable finish

Temperature of top-face must never be allowed to exceed 27°C. UFH protocol to control temperature conditions is recommended.

‡ Pack lengths will either 1950mm or 2400mm dependant upon stock availability.

INSTALLATION AND WARRANTY All Havwoods floor must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Havwoods warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standards worldwide.

This technical data sheet was written by Havwoods International. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs use in the sheet are intended only as illustrations. No rights can be derived from them.