


Technical Data Sheet

Version 2.0

HW3298

Vuren

Henley

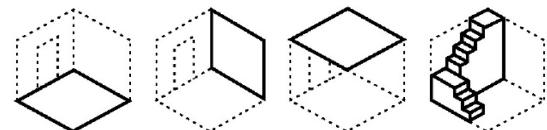

Specification

Pattern	Herringbone
Construction	Multi-layered engineered
Top Layer Specie	European oak (Quercus robur)
Surface Process	Heavy brushed & smoked [^]
Finish	UV oiled
Connection System	Tongue & groove
Edge Profile	4-sided bevelled edge
Backing	Eucalyptus plywood (Eucalyptus grandis)
Wear Layer Thickness	3mm
Total Thickness	14mm
Width	125mm
Length	600mm
Pack Size	0.90m ²
Grade	Rustic

CERTIFIED BY
SCS Global ServicesThe mark of
responsible forestry
FSC® C009500

Key

[^] Please note that this is a smoked/fumed product. This reactive process will typically generate a wider range of colour variation in the product.

* Subject to compatible subfloor and correct installation (see Installation Guidelines) including sensors.

Temperature of top-face must never be allowed to exceed 27°C. UFH protocol to control temperature conditions is recommended.

Installation Methods

Fully Bonded	Yes* (recommended)
Nailed/Screwed	No
Floated on Underlay	No
Over Underfloor Heating	Yes*# (please ask for our technical guidelines)

All Havwoods floor must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Havwoods warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standards worldwide.

Grading Criteria

Sound Knots	Up to 45mm Ø allowed
Broken Knots	Up to 40mm Ø allowed
Filled Defects	Half-filled
Heat/Pith	Allowed
Sapwood	Up to 40mm width allowed
End Checks	Up to 5mm wide & 100mm long
Insect Damage	Up to 3mm (no more than 2)
Filler	Allowed
Colour Variation	Allowed
Small Cracks	Up to 5mm wide & 50mm long
Inner Bark	Not allowed
Modullary Rays	Allowed

N.B. The product grading criteria is inspected at each mill visually and should be taken as an approximation only. To allow for unavoidable variations in the material characteristics, 3% of materials may vary from the stated range.

Technical Criteria

Origin	Asia
Certification	FSC® Certified (FSC-C009500), FloorScore®
Janka Hardness Rating	1,120 lbf (4,980N)
Formaldehyde Emissions	E1 (EN 717-1)
Pentachlorophenol Emissions	< 5ppm (CEN/TR 14823)
Reaction to Fire Classification	Dfl-s1 (EN 13501-1:2007)
Slip Testing	54/31 PTV (CEN/TS 15676:2007)
Thermal Conductivity	λ 0.13 W/m K (EN 12664)



HAVWOODS

**For More Information
Contact Our Experienced Team:**

Tel: +44 (0)1524 737 000 | Fax: +44 (0)1524 737 001
Email: info@havwoods.com

Comprehensive maintenance instructions and materials are available from Havwoods for all floors.



This technical data sheet was written by Havwoods International. At the time of writing and publication, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this document are intended only as illustrations. No rights can be derived from them.

