


Technical Data Sheet

HW221013 BRUSHED NOUGAT

TreeAzzo

Usage: See Havwoods quick reference guide to choosing the correct product

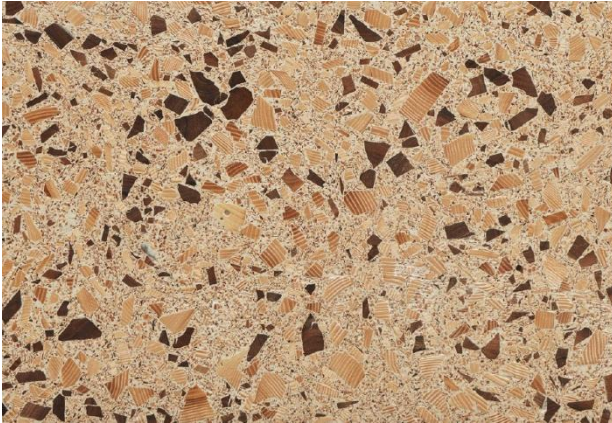

The photographs used in this sheet are intended only as illustrations, colours shown are only as accurate as the printing process or device screen will allow. Due to the size of this photograph, it does not provide any indication of grading. Please refer to our separate grading rules. No rights can be derived from them.

Product Details

| | |
|----------------------|--|
| Product Code | HW221013 |
| Product Range | TreeAzzo |
| Construction | Multi Layered Engineered |
| Top Layer Specie | Epoxy Resin & Wood Elements |
| Process | Brushed |
| Finish | Natural Oiled |
| Profile | Planed All Round (PAR) |
| Edge Profile | Square Edge |
| Backing | Hardwood Plywood |
| Wear Layer Thickness | 5mm |
| Total Thickness | 23mm |
| Width | 1200mm |
| Length | 2500mm |
| Pack Size | 3.00m ² |
| Maintenance | Comprehensive maintenance instructions and materials are available from Havwoods for all floors. |

Installation Methods

| | |
|-------------------------|------|
| Fully Bonded | Yes* |
| Nailed | No |
| Floated on underlay | No |
| Over Underfloor Heating | No |

Product Information

TreeAzzo is a resin bound wood particle product. It is 100% handmade making each panel truly unique. The high-quality, eco-friendly resin is mixed with wood chip wastage from the woodworking industry. The result is a modern twist on a contemporary classic of terrazzo style products.

NB: The product grading criteria is an approximation only. Please ask for details. Contact your Havwoods consultant on 1300 428 966.

Technical Criteria

| | |
|----------------------------|------------------------------|
| Origin | Poland |
| Sustainability | FSC® Certified (FSC-C009500) |
| Formaldehyde Emission | E1 (EN 717-1) |
| Pentachlorophenol Emission | < 5ppm (CEN/TR 14823) |
| Slip Testing | EN 13036-4 – P4 |
| Reaction to Fire | D-s3, d0 EN 13823+A1:2022 |
| Thermal Conductivity | NPD |



The mark of responsible forestry

^ Please note that this is a smoked/fumed product. This reactive process will typically generate a wider range of colour variation in the product.

* Subject to compatible subfloor and correct installation (see Installation Guidelines) including sensors.

** This product may require on-site sanding prior to applying a suitable finish

Temperature of top-face must never be allowed to exceed 27°C. Under Floor Heating UFH protocol to control temperature conditions is recommended.

‡ Pack lengths will either be 1950mm or 2400mm dependent upon stock availability.

Installation and Warranty: All Havwoods floor must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Havwoods warranty will apply only to products which have been installed by a competent installer adhering to Australian standards or equivalent standards worldwide.

© This technical data sheet was written by Havwoods International. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in the sheet are intended only as illustrations. No rights can be derived from them.



Havwoods Australia, 6 Spitfire Place,
Rutherford, NSW 2320
1300 428 966
info@havwoods.com.au
www.havwoods.com.au