


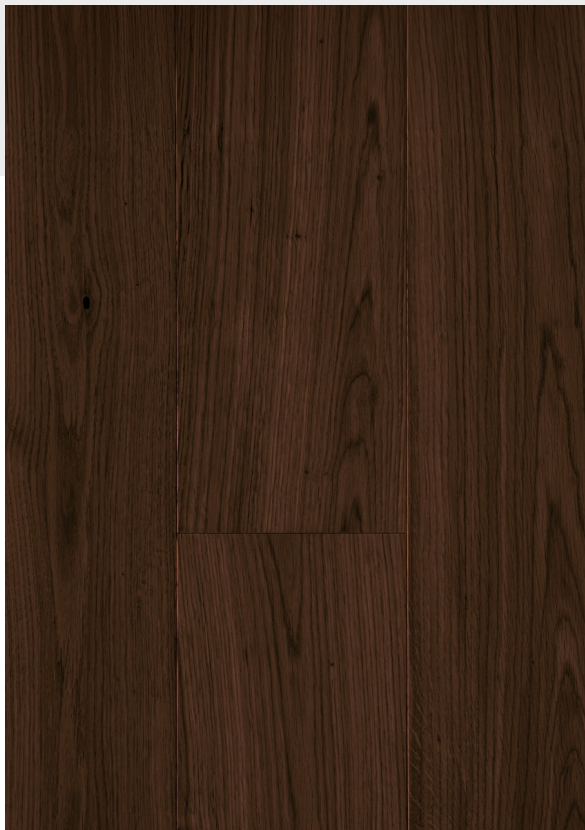

Technical Data Sheet

Version 1.0

HW3356

Pontchartrain

Venture Plank



Specification

Pattern	Plank
Construction	Multi-layered engineered
Top Layer Specie	White Oak (<i>Quercus alba</i>)
Surface Process	Brushed
Finish	Lacquered
Connection System	Tongue & grooved
Edge Profile	4-sided bevelled edge
Backing	Eucalyptus/birch plywood (<i>Eucalyptus grandis</i> /Betula spp.)
Wear Layer Thickness	4mm
Total Thickness	5/8" (16mm)
Width	7 1/2" (190mm)
Length	72" (1830mm)
Pack Size	TBC
Grade	Select

Key

* Subject to compatible subfloor and correct installation (see Installation Guidelines) including sensors.

Temperature of top-face must never be allowed to exceed 27°C. UFH protocol to control temperature conditions is recommended.

Installation Methods

Fully Bonded	Yes* (recommended)
Nailed/Screwed	No
Floated on Underlay	Yes*
Over Underfloor Heating	Yes*# (please ask for our technical guidelines)

All Havwoods floor must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Havwoods warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standards worldwide.

Grading Criteria

Known as either select or classic grade, typically this will have a mix of almost prime boards with other planks which have more knots. Slightly larger knots are allowed in this grade. Heartwood and colour variation in the timber should be expected and there may be some checks (cracks across the growth ring), sapwood and filler. The colour of the filler is intended to complement the natural structure of the wood, where features such as knots are in contrast to the surrounding timber, and it may vary from batch to batch.

N.B. The product grading criteria is inspected at each mill visually and should be taken as an approximation only. To allow for unavoidable variations in the material characteristics, 3% of materials may vary from the stated range.

Technical Criteria

Origin	USA
Janka Hardness Rating	1,350 lbf (5,990 N)



HAVWOODS

For More Information Contact Our Experienced Team:

Tel: 1 347 523 8930
Email: info@havwoodsusa.com

Comprehensive maintenance instructions and materials are available from Havwoods for all floors.



This technical data sheet was written by Havwoods International. At the time of writing and publication, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this document are intended only as illustrations. No rights can be derived from them.

