

SB-47 SonicBeam



Overview

Creates tightly focused beam of sound 4' wide. Increase width of beam with custom width speaker.

Amplification

Standard amp delivers audio in mono; can be wired for stereo for additional cost. Customize with Myriad for SmartVolume capabilities and sensor options.

Stereo Separation

6 dB

Frequency Response

150Hz – 20kHz, +/- 2dB

Amplifier Power Requirements

Minimum: 1 watt per channel
Maximum: 100 watts peak per channel

Sensitivity


100 dB SPL 1 watt, 1 meter

Impedance

8 Ω Stereo, 4 Ω Mono

Physical Dimensions

47"W x 5.492"H x 4.586"D
(1194mm x 139mm x 116mm)

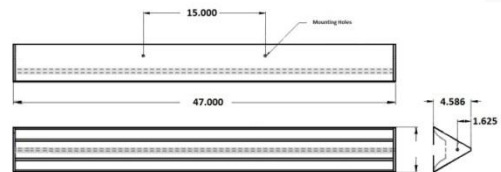

Mounting

Grommets on back of speaker.
Mounting bracket available.

Weight

10.25lbs. (4.6kg)

Power Supply

17 Vac 1.25 Amp
120 Vac external wall pack supplied
100 Vac and 220 Vac available