


Technical leaflet

EGGER Painting Grade ABS Edge Banding

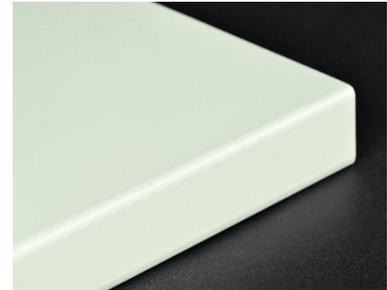

EGGER Painting Grade ABS Edge Banding differ from a conventional EGGER ABS edge banding only in the surface. The processing of paintable edge bandings is easily possible in both, continuous lines and processing centers. Please observe the EGGER ABS edge banding processing instructions.

It is usually not necessary to prime or sand the edging before, however, it must be free from dust and dirt. Using conventional separating agents, coolants or cleaning agents generates bonding problems in the lacquering step.

EGGER Painting Grade ABS Edge Banding are particularly suitable for lacquering, also many water-based lacquers have good bonding properties too. Coordination with the lacquer manufacturer and tests under local conditions are required.

Provisional note:

This technical leaflet has been carefully drawn up to the best of our knowledge. The information provided is based on practical experience, in-house testing and reflects our current level of knowledge. It is intended for information only and does not constitute a guarantee in terms of product properties or its suitability for specific applications. We accept no liability for any mistakes, errors in standards, or printing errors. In addition, technical modifications may result from the continuous development of EGGER ABS edge banding, as well as from changes to standards and public law documents. The contents of this technical leaflet should therefore not be considered as instructions for use or as legally binding. Our General Terms and Conditions apply.