


## Technical datasheet

### EGGER PMMA Edge Banding

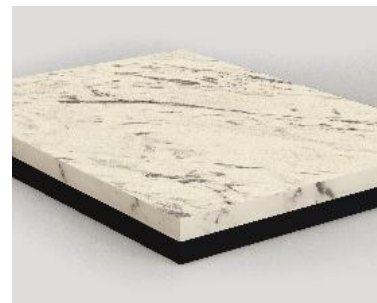

### Technical Data

Any material or process related irregularities must not be apparent at a distance of 19.69 inch (0.5 m).

Properties	Unit	Value	Standard
Light fastness for use in internal areas	Grey scale	4 - 5	EN 438-2
Indentation hardness	N/mm <sup>2</sup>	> 70	ISO 2039-1
Hardness Shore D	-	80	ISO 868
Impact strength, 73,4°F (23°C) notched	KJ/m <sup>2</sup>	7 - 8	ISO 179/2C
Impact strength, 73,4°F (23°C) unnotched	KJ/m <sup>2</sup>	70	ISO 179/2D
Vicat softening temperature	°F (°C)	212°F (>100°C)	ISO 306, Method B/50
Chemical resistance	-	1B*	DIN 68861
Shrinkage (1h at 176°F (80°C))	%	< 1.0	-
Static charging	-	low	-

\*Resistance to solvents and alcohols is limited, see cleaning and chemical properties.

### Processing characteristics

Machining	PMMA suitability
Cutting	good
Milling direction	counter direction <sup>1)</sup>
Pre-milling	good
Radius milling	good
Profiling	good
Scraper processing	good
Buffing	good
Bonding	all regular edging hot-melt adhesives can be used
Polish ability	very good

Stress whitening	medium
Machining center processing compatibility	good

<sup>1)</sup> Counter direction milling is recommended for all thermoplastic edging material.

## Tolerances

### Edge banding width

Width inch [mm]	Tolerance inch [mm]
0.472 – 2.126 (12 – 54)	± 0.018 (± 0.45)

### Edge banding thickness

Thickness inch [mm]	Tolerance inch [mm]
0 – 0.039 (0 – 1.0)	+ 0.004 / - 0.004 (+ 0.10 / - 0.10)
0.043 – 0.079 (1.1 – 2.0)	+ 0.004 / - 0.008 (+ 0.10 / - 0.20)
0.083 – 0.118 (2.1 – 3.0)	+ 0.006 / - 0.010 (+ 0.15 / - 0.25)

### Pre-tension

Thickness inch [mm]	Width up to 1.181 inch (30 mm)	Width over 1.181 inch (30 mm)
0 – 0.039 (0 – 1.0)	0.00 – 0.016 (0.00 – 0.40)	0.00 – 0.020 (0.00 – 0.50)
0.043 – 0.118 (1.1 – 3.0)	0.00 – 0.012 (0.00 – 0.30)	0.00 – 0.016 (0.00 – 0.40)

### Plane-parallelism

Thickness inch [mm]	Maximum deviation inch [mm]
0 – 0.079 (0 – 2.0)	0.004 (0.10)
0.083 – 0.118 (2.1 – 3.0)	0.006 (0.15)

### Longitudinal distortion

Thickness inch [mm]	Maximum stretching to 39.370 inch (1 m) length inch [mm]
0 – 0.118 (0 – 3.0)	0.118 (3.0)

Quality management ISO 9001

Coding: TD PMMA US EN

Revision: 02

Approval: DEC-01-2020

## Storage

EGGER PMMA Edge Banding tape is resistant to rot and may therefore be stored at room temperature (68°F to 77°F) in a room that is weatherproof and protected from direct sun light for a virtually unlimited period.

Information on working with EGGER PMMA Edge Banding can be found in our processing instructions.

### Provisional note:

This technical datasheet has been carefully drawn up to the best of our knowledge. The information provided is based on practical experience, in-house testing and reflects our current level of knowledge. It is intended for information only and does not constitute a guarantee in terms of product properties or its suitability for specific applications. We accept no liability for any mistakes, errors in standards, or printing errors. In addition, technical modifications may result from the continuous development of EGGER PMMA Edge Banding, as well as from changes to standards and public law documents. The contents of this technical datasheet should therefore not be considered as instructions for use or as legally binding. Our General Terms and Conditions apply.