

Interior & Exterior Projects

PAINTERS PLUS™ Caulk

De-aired for a Smoother Bead / No Plasticizers or Phthalates / Watertight Seal

Titebond® Painters Plus™ Caulk is an interior and exterior use, siliconized acrylic caulk that provides a strong, weather-resistant seal for most construction and repair applications. It is easy to extrude, resists cracking and chalking and won't stain or bleed through the paint. This mildew resistant formula contains no plasticizers or phthalates and will not cause shiners. Titebond Painters Plus is a non-stringing formula that won't sag or drool and it has excellent bead cut-off.

40 YEAR WARRANTY

Ideal For

Interior and Exterior Applications Like:
Sealing Joints / Repairing Cracks / Back-Filling Gaps

Seals

Wood / Metal / Glass / Masonry / Aluminum /
Brick / Most Common Building Materials

Ultra Low VOC

VOC-compliant in all 50 states

Weather Resistant


Produces long-lasting weather-tight seals

Paintable

May be painted with a water-based (latex-based)
paint 2-4 hours after application

Wide Temperature Application Range

40°F - 120°F

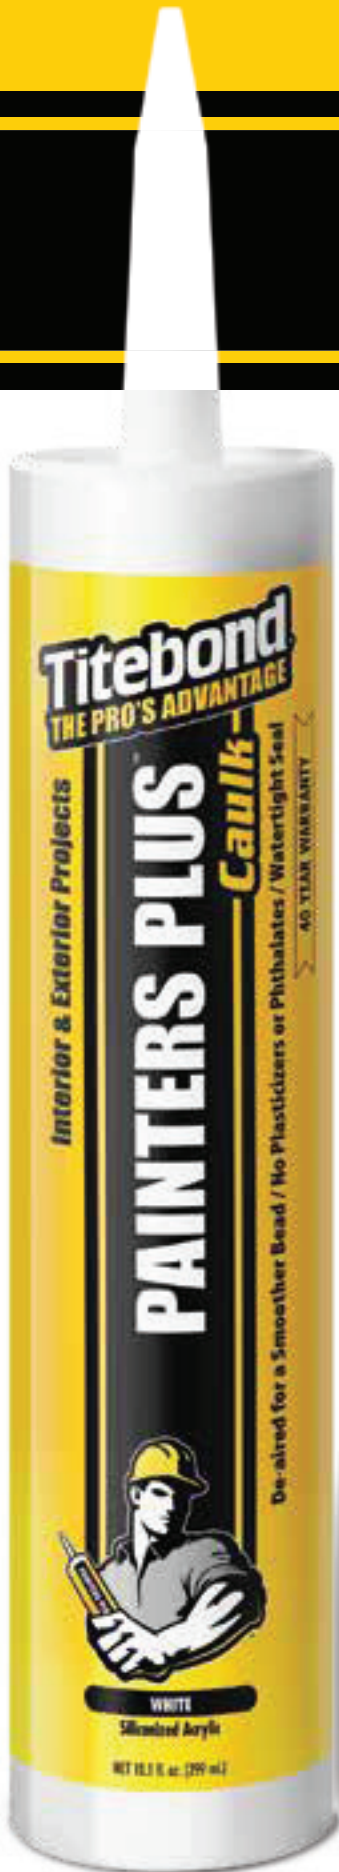

Titebond®
THE PRO'S ADVANTAGE

Ordering/Sku Information

Size/Color	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
10.1 Oz. Cartridge / White	8301	037083083019	10037083083016	14.82 lbs.	12	108
10.1 Oz. Cartridge / Clear 8 Colors Available	8331	037083083316	10037083083313	10.01 lbs.	12	108

Physical & Chemical Properties

- Type: Siliconized acrylic
- Calculated VOC: <50 g/L (<1.5%)
- Weight per gallon:
 - White & colors: 13.5 lbs.
 - Clear: 8.8 lbs.
- Tooling time: 10-15 minutes
- Full cure: 3-7 days*
- Freeze thaw stability: Stable
- Flashpoint: Solvent free/Not applicable
- Application temperature: Above 40°F (4°C)
- Joint movement capability: Flexible
- Storage life: 24 months in a dry location at or below 75°F
- Coverage: 31 linear ft. at a 1/4" bead
- Paintable: 2-4 hours
- Tack-free time: 2-3 hours
- Solids:
 - White & colors: 82%
 - Clear: 60%
- Cleanup: Clean uncured material with water. After curing, excess sealant must be cut or scraped away.

*Cure will be affected by joint size, configuration and environmental conditions.

Specifications

Complies with the following requirements:

- White & colors: ASTM C834 Type OP Grade -18°C
- Clear: ASTM C834 Type OP Grade Ⅹ

Application

Titebond® Painters Plus Caulk comes ready to use. Surfaces must be clean and free of any material that may prevent adequate adhesion. Properly designed joint not to exceed 1/2" in depth. Cut tip at 45° angle for 1/8" to 1/2" bead and place in cartridge gun. Force caulk into clean joint. If necessary, smooth bead immediately. It is the sole responsibility of the user to thoroughly test any proposed use with all substrates to determine project suitability.

Limitations

Not designed for continuous submersion or use below the waterline. Air, caulk and surface temperature should be above 40°F. Do not apply if rain is expected within 12 hours. Cure time is dependent upon ambient conditions including temperature and humidity. The caulk should be dry to the touch and ready to paint in 2-4 hours with a water-based (latex-based) paint. For other paint types, a compatibility test is recommended. It is highly recommended to use backing material. For best results, store in a dry location at or below 75°F. NOTE: Titebond Painters Plus Clear (8331) will be white during application, but will turn clear within 7-14 days. For questions, please call our Help Line at 1.800.347.4583 or visit us at Titebond.com.

40 Year Limited Warranty: If not satisfied with product performance when used as directed, return container and proof of purchase to Franklin International, Inc. for replacement of product. Liability is limited to product replacement only.



Proudly Supplied By

RUGBY[®]
Architectural Building Products

1-855-650-3265 | www.rugbyabp.com