


**Endura vs. Traditional ADA Sills**


Endura's ADA Compliant Sills provide a distinct advantage over the competition with unique design features which guard the doorway from air and water infiltration.

**Endura ADA Sills**

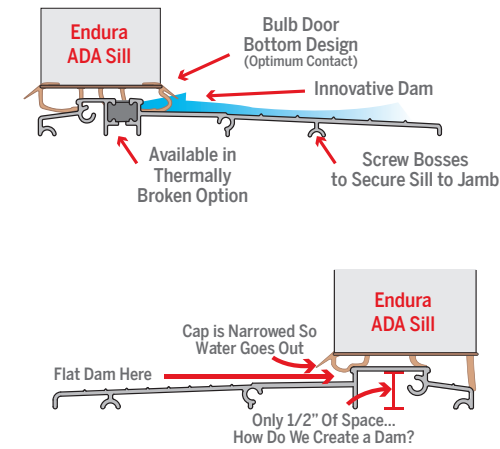


Endura's patented dam feature provides the most effective method for preventing air and water infiltration.

**Other ADA Sills**

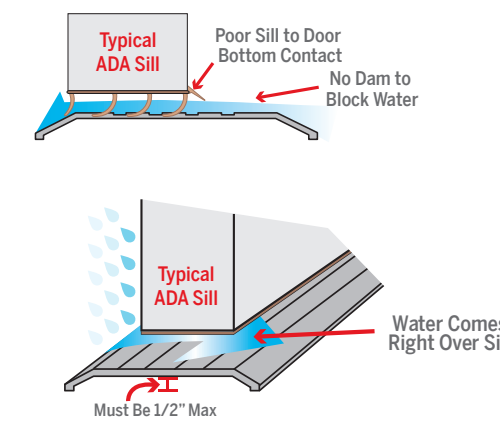


Other ADA Sills cannot compete with Endura. Their sills and door bottoms allow air and water to infiltrate into the home.

**Sill Options**

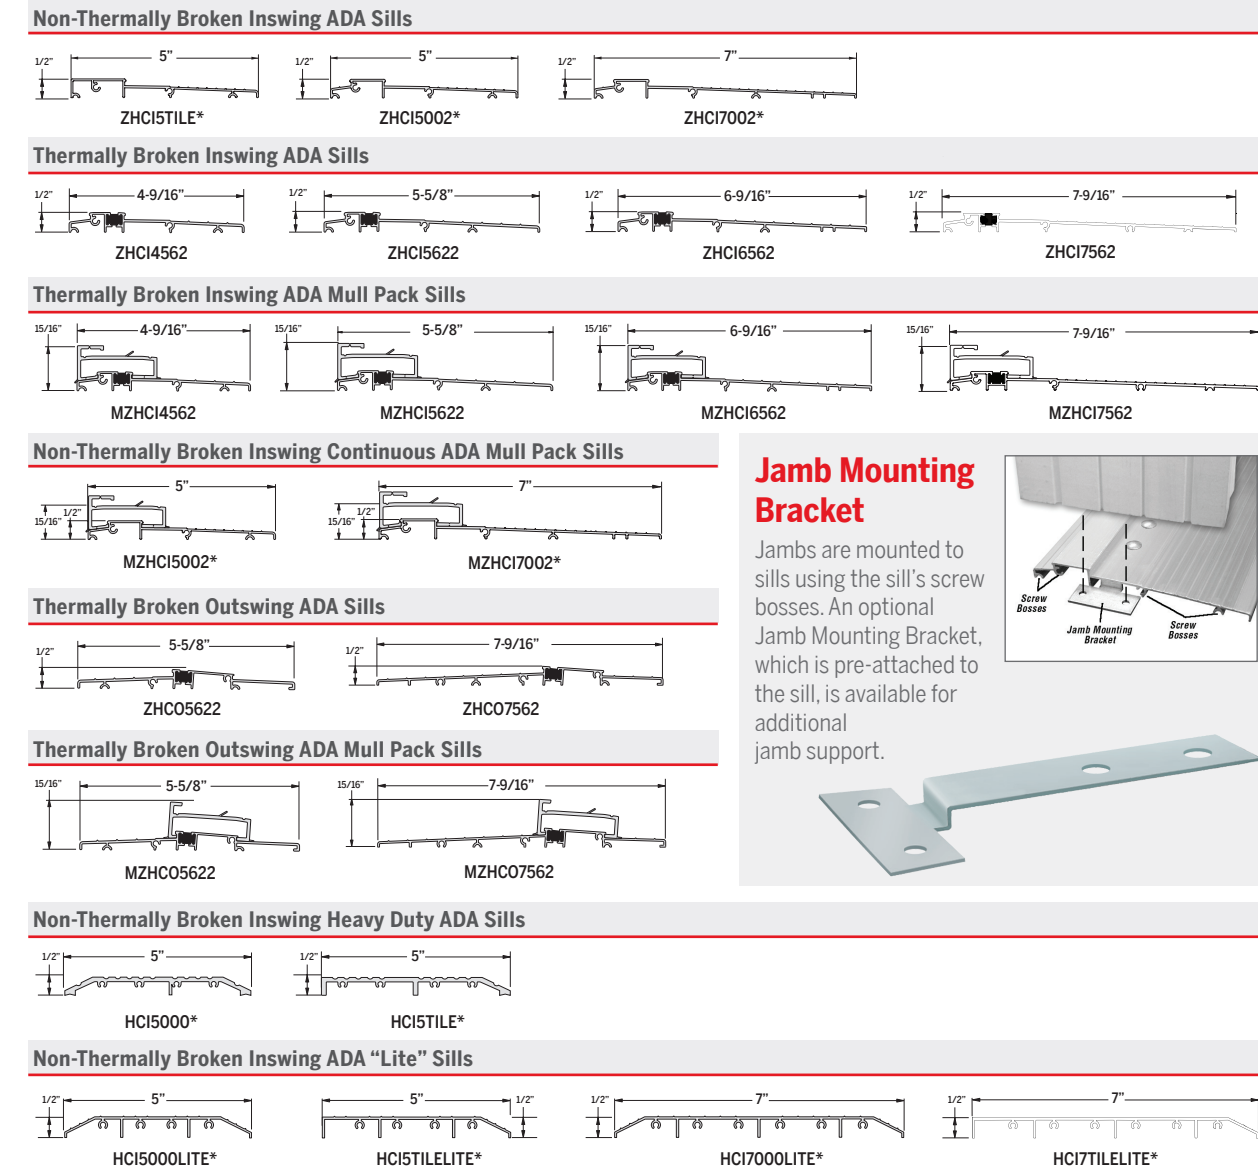


**Jamb Mounting Bracket**

Jamb mounting brackets are used to secure sills to the jamb. An optional Jamb Mounting Bracket, which is pre-attached to the sill, is available for additional jamb support.




\*Available in Mill only

**ADA Mull Boot Sizes**

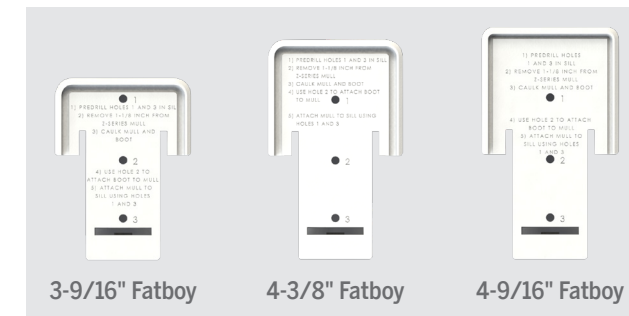

**Aluminum Finish Options**



8817 W. Market St., Colfax, NC 27235  
 1.800.334.2006 www.enduraproducts.com

Innovation protected under patents and patents pending in U.S. and Canada. See www.EnduraPatents.com.  
 Effective 11.19 © Endura Products, Inc. Form# ADA-19




The difference is superior performance  
**ADA Compliant Sills**



Provides easy entry and prevents air and water infiltration.



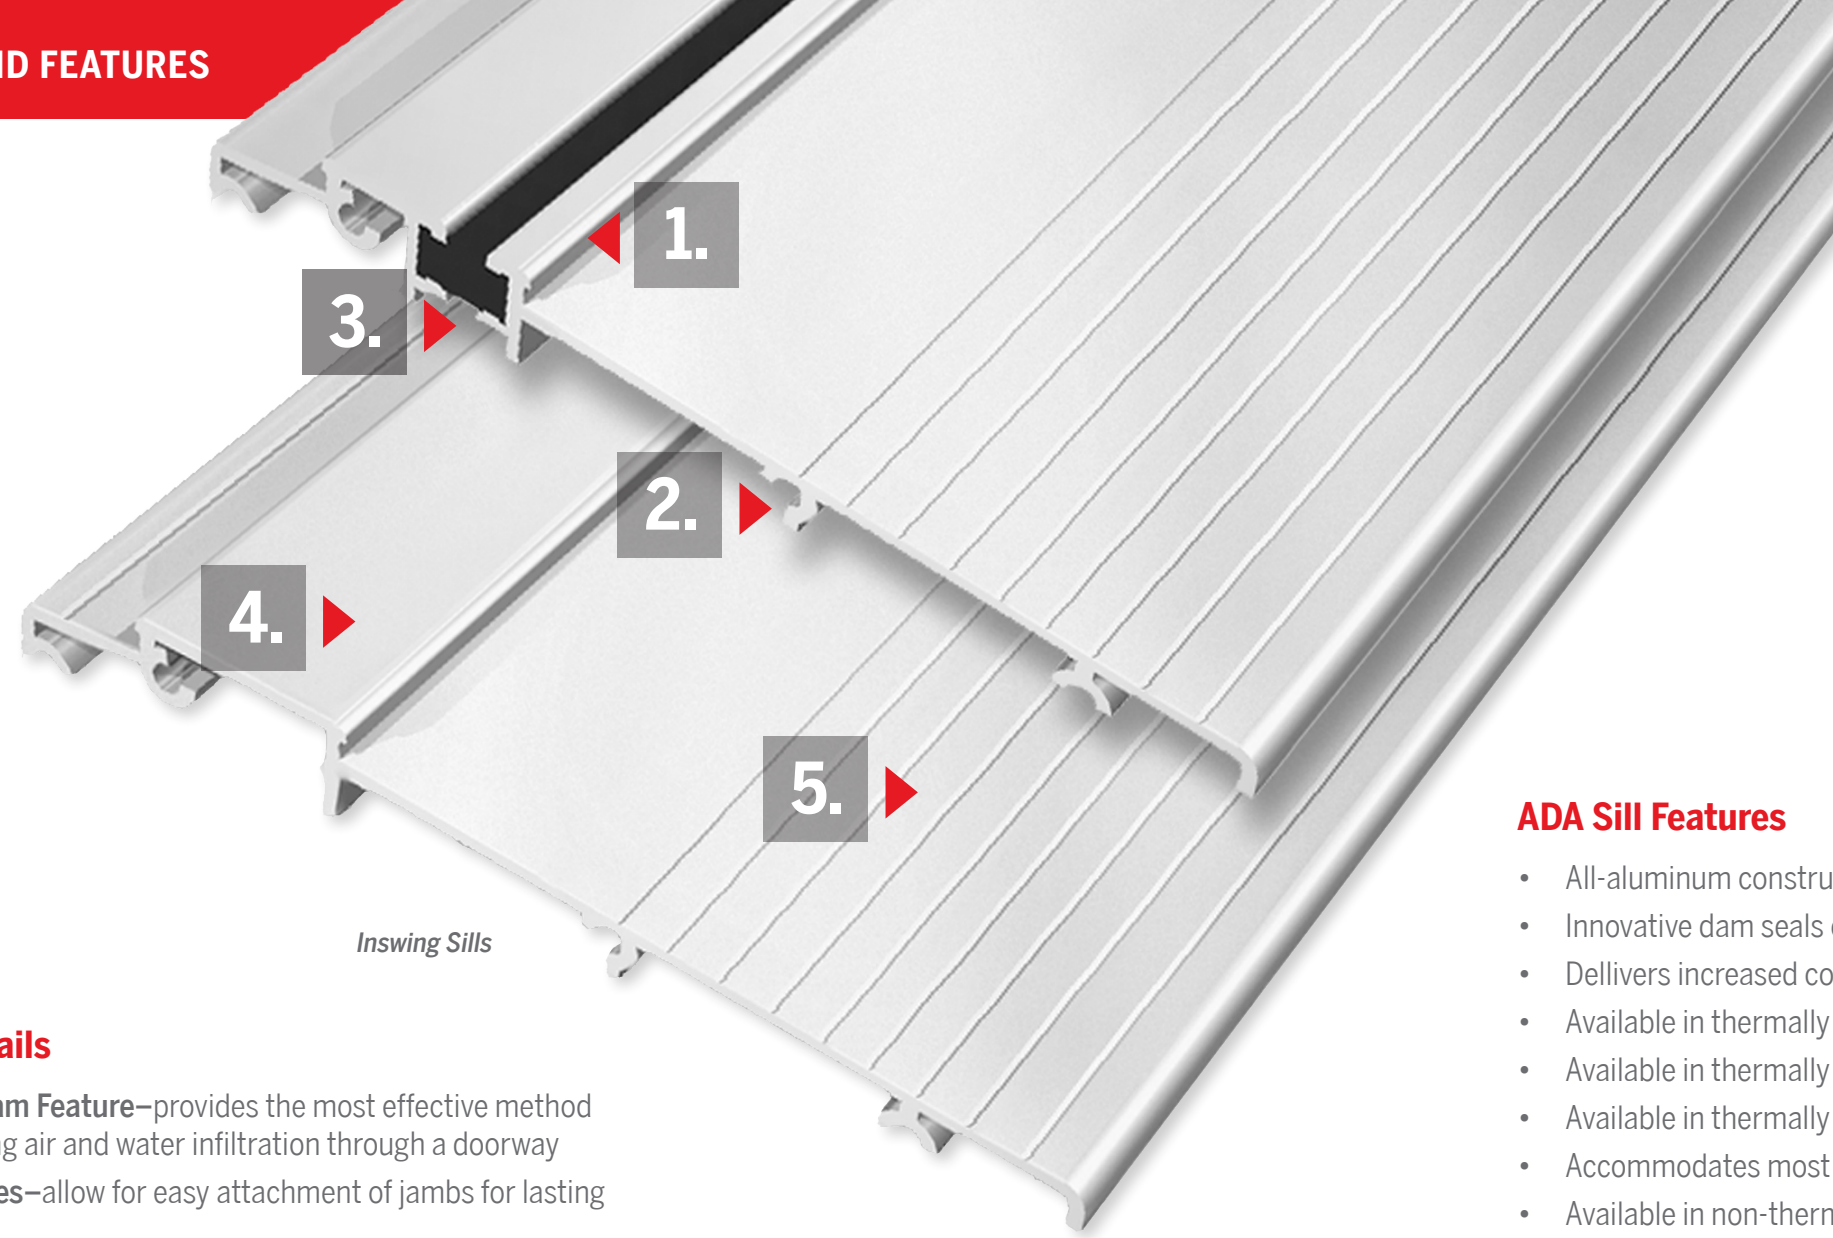

Inswing Sills

**ADA Sill Details**

1. **Patented Dam Feature**—provides the most effective method for preventing air and water infiltration through a doorway
2. **Screw Bosses**—allow for easy attachment of jambs for lasting support
3. **Thermally Broken Option**—adds an extra level of protection against extreme conditions where there is a significant temperature difference between the exterior and interior of the home.
4. **Non-Thermally Broken Option**—better for environments with less significant temperature differences between the exterior and interior of the home.
5. **Durable Aluminum**

**Tileback Design for Inswing Sills**

Tileback design allows the sill to be flush against the tile, connecting the entryway and floor with a precise fit and proper seal with no additional work required.




Outswing Sill

**ADA Sill Features**

- All-aluminum construction available in mill (*non-thermal only*) or bronze sill finish
- Innovative dam seals out air and water while maintaining ADA sill height compliance
- Delivers increased contact with door bottom
- Available in thermally broken inswing 4-9/16", 5-5/8", 6-9/16" and 7-9/16" sizes
- Available in thermally broken outswing 5-5/8" and 7-9/16" sizes
- Available in thermally broken inswing mull pack 4-9/16", 5-5/8", 6-9/16" and 7-9/16" sizes
- Accommodates most single, hinged patio and French door system configurations
- Available in non-thermally broken inswing 5", 5" (tileback), 7" and 7" (tileback) sill sizes
- Sidelite seat cap option (not available with tileback sills)

**ADA "Lite" Sills**


Endura's ADA Lite sills offer a less expensive option that still provides strength and performance while fitting Residential ADA Compliant requirements. Available in 5", 5" tileback and 7" tileback sill sizes.

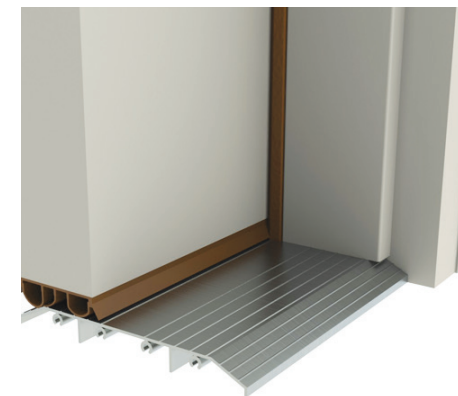

- Less Aluminum for a Lower Cost**—uniquely supported design allows for thinner aluminum structure while maintaining strength and performance of the sill
- Tested to Perform**—400 lb. rollover testing ensures performance with necessary weight requirements
- ADA Compliant**—1/2" maximum threshold or top surface height, meets ADA code requirement
- Light Commercial and Multi-Family Use**—offers the same durable aluminum used in current ADA sills
- Support Bracket Option**—for extra level of securing to frame


**ADA Mull Boot**

Endura's ADA mull boots offer a simplified solution to the tedious process of modifying existing mulls to fit the unique contour of ADA compliant sills. This innovative product works just like a regular mull boot, and snaps right onto our ADA sills in just a few simple steps.

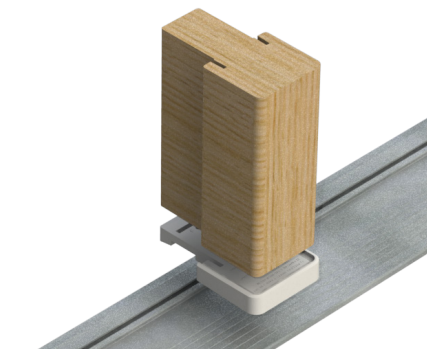


- Available in three sizes: 3-9/16" Fatboy, 4-3/8" Fatboy and 4-9/16" Fatboy
- Simplifies conversion of inswing mulls to adapt to the ADA profile
- Simple to use, with instructions printed directly on the boot
- Eliminates the need to cut the mull in the ADA profile—just one straight cut is all you need.

**ADA Compliant Sidelite Seats**

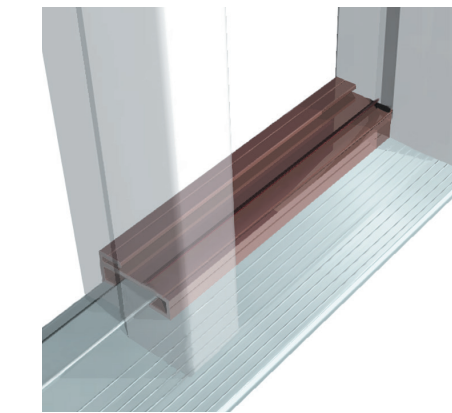

All the benefits of an ADA sill with inactive caps that can be repositioned to create a variety of multiple opening door units from the same SKU. (Not available with tileback sills.)

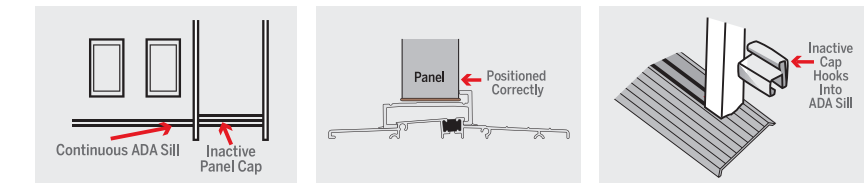

**Drilling Templates**

We offer drilling templates for screw locations to simplify setup and production for preparation of the jamb during pre-hanging.



Template for 4-9/16" up to 7" inswing/outswing sills and 7-9/16" outswing sills

Template for 7-9/16" inswing sills

