

SUPERIOR SPECIFICATIONS FOR OUTSTANDING PERFORMANCE

WEYERHAEUSER ULTRA-POUR™ HIGH DENSITY OVERLAY CONCRETE FORM

Weyerhaeuser's Ultra-Pour™ HDO concrete form pre-composed cross-bands provide a tight core line and excellent durability. Designed for rigorous commercial concrete forming applications where re-use, consistent surface appearance and performance are critical. Gain the competitive edge with Weyerhaeuser's family of Ultra-Pour™ concrete form products.

- Structural 1, Group 1 Species, PS 1-09 Specification
- Highest quality edge seal
- A smooth pre-sanded face offering minimum grain transfer with a 2-step process

Available upon request:

100/30

100/100

Ensures a smooth architectural type finish by using high density overlay, pre-sanded panels.




WEYERHAEUSER ULTRA-POUR™ HDO CONCRETE FORM

SPECIFICATIONS

Faces	
APA "B" Grade	
Smooth uniform finish enhances durability of product	
Increased pours	
Minimum grain transfer	
Center and Core	
Weyerhaeuser's high integrity Ultra-Core® construction features composed cross bands for tight core gap tolerances far more stringent than APA and industry specs	
One piece "High C" backs with HDO backer	
Construction and Thickness	
Thickness and ply count	
1/2" – 5 Ply	
5/8" – 6 - 7 Ply	
3/4" – 7 Ply	
1" – 9 Ply	
1 1/8" – 10-12 Ply	
Available in 100/30, 100/100	Average Pour Range
Standard size 4' x 8' Full thick	Up to 30 Pours* * Pour ranges are not guaranteed, the number of pours will vary based on job site conditions, concrete mix properties, release agent and overall panel handling.

Recommended Maximum Pressures on Structural I Plyform (psf) Face Grain Across Supports								
Support Spacing (in.)	Plywood Performance Category							
	1/2		5/8		3/4		1-1/8	
8	980	980	1310	1310	1680	1680	2785	2785
12	410	435	580	580	745	745	1540	1540
16	175	235	270	330	375	420	835	865
19.2	100	135	160	215	230	290	545	600
24	-	-	-	110	120	160	310	385
32	-	-	-	-	-	-	145	190

ABBREVIATED FORM NO. V345V © 2012 APA - ENGINEERED WOOD ASSOCIATION TABLE 5

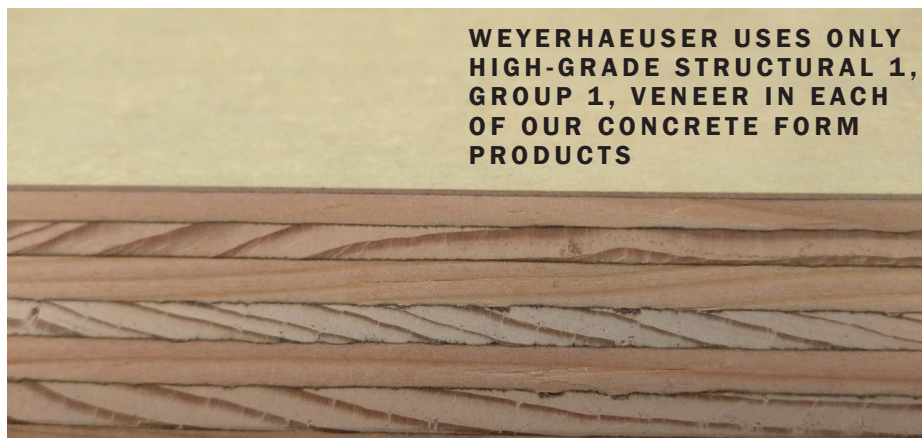

See the Safety Data Sheet (SDS) for further product information.


CONTACT US

800.548.3099

weyerhaeuser.com/woodproducts

WEYERHAEUSER ULTRA-POUR™ HDO CONCRETE FORM PRODUCTS

- 1/2" = 60 PC UNIT
- 5/8" = 50 PC UNIT
- 3/4" = 44 PC UNIT
- 1" = 30 PC UNIT
- 1-1/8" = 26 PC UNIT

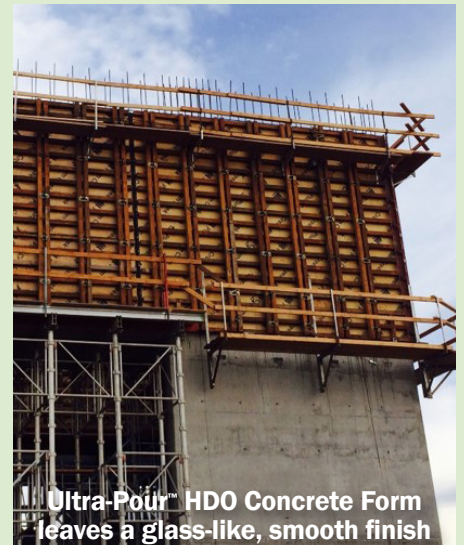

Certified Sourcing

www.sfiprogram.org
SFI-00008

APA structural panels (PS-1) are exempt from the California Air Resources Board regulations, however, this product does not contain Urea Formaldehyde so is considered NAF.

Proudly Distributed By

HARDWOODS[®]

Materials That Inspire

SEARCH

BE INSPIRED



Visit Our Websites

hardwoods-inc.com

designonesource.com

Contact Us

888.826.5528

info@hardwoods-inc.com